




Product User Manual for GOME Total Columns of Ozone, NO₂, tropospheric NO₂, BrO, SO₂, H₂O, HCHO, OCIO, and Cloud Properties

(O3M-SAF OTO and NTO)

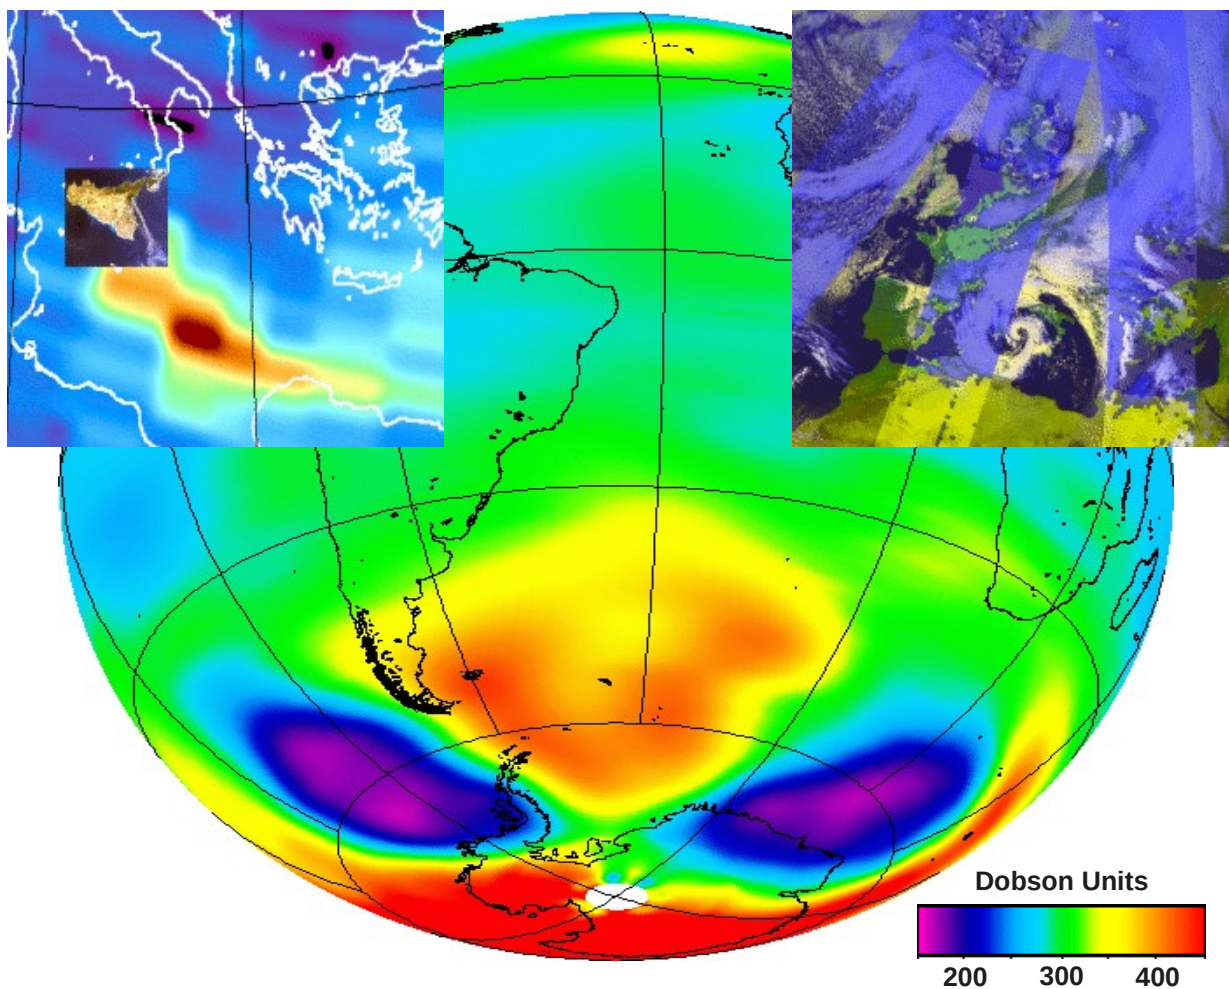

Doc. No: DLR/GOME/PUM/01

Iss./Rev.: 2/E

Date: 8 August 2012



Signatures

<i>Action: Name</i>	<i>Affiliation</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
prepared by: D. Loyola R. W. Zimmer S. Kiemle P. Valks M. Pedergnana	DLR-MF DLR-MF DLR-DFD DLR-MF DLR-MF	GOME Project Manager GOME Project Engineer DIMS Project Manager GOME Project Scientist GOME Project Engineer	8 August 2012	
H ₂ O, HCHO by: S. Emmadi	former DLR-MF	GOME Project Engineer	25 March 2011	
BUFR v3 by: L. Butenko	former DLR-MF	GOME Project Engineer	14 June 2006	
HDF5 by: Y. Livschitz	Former DLR-MF	GOME Project Engineer	1 November 2004	
released by: D. Loyola R.	DLR-MF	GOME Project Manager	8 August 2012	

Distribution List

<i>Function</i>	<i>Organization</i>
UPAS Team	DLR-MF, DLR-DFD
GOME/ERS-2 Team	ESA, BIRA, RTS, AUTH, various
O3M-SAF Team	EUMETSAT, FMI, AUTH, BIRA, KNMI, various



Document Change Log

<i>Issue</i>	<i>Rev</i>	<i>Date</i>	<i>Section</i>	<i>Description of Change</i>
1	A	31 July 2004 to 20 July 2006	all	HDF5 and BUFR output product format documents merged in this product user manual
1	B	5 October 2006	4, 5	Content of chapters added
1	C	10 November 2006	all	First official version of this document
1	D	6 March 2007	5.7 6.2, 6.5	Fix file name convention Added VCDQualityIndicator, QualityFlags, CloudMode, CloudType, AMFTotal, AMFTotal_Error, OrbitActualDuration, new receiving stations
1	E	30 April 2008	all 6 7	Revised following ORR-A Added in HDF5 section: - IterativeVCDNumberOfIterations - a-priori O3_Profile - T_Profile BUFR product update to BUFR version 4
2	A	9 December 2008 28 January 2009	all 6	Revised following ORR-B Finalized HDF5 product format: -Moved trace gas specific datasets into own groups inside DETAILED_RESULTS -Moved cloud properties into own group
2	B	16 November 2009	6	Update H ₂ O and HCHO format, new sections 6.6.4, 6.6.5, 6.7.4, 6.7.5 Minor corrections: -SurfaceAlbedoRW → SurfaceAlbedo -Total Columns and BrO cleanup
		18 December 2009	6	PixelFlag under Geolocation section is renamed to SurfaceConditionFlag. SurfaceConditionFlag definition added. H2OFlag definition changed.



2	C	23 April 2010	1.1	Add reference to reprocessed GOME-2
			5.9.2	Add new O3M-SAF logo and web page
			6.4	Finalized NO ₂ HDF5 entries
			6.2	Added PMD dataset descriptions
			7.2	Add WMO/GTS bulletin identifier
			8	New section
			6.8.4	New flag value added to SO ₂ _Flag
			6.8.6	New flag value added to HCHO_Flag
2	D	25 March 2011	6.8.1	Renamed SurfaceCondition_Flag to SurfaceConditionFlags
			6.2	Removed obsolete FittingFlag, AMFFlag and VCDFlag
			6.8.5	New definitions for H ₂ O_Flags
			6.3	Converted ViewMode to integer and added DescendingFlag
2	E	8 August 2012	4.1	Added new chapter GDP-5.0 used for GOME/ERS-2 O ₃ products Added CHOCHO entries for future use (globally) Added NO ₂ entries: - AMF Tropo Error field - AMF Tropo To Ground Error field - AMF Tropo To Cloud Error field - VCD Corrected Error field - VCD Strato Error field - Averaging Kernel field - Averaging Kernel Pressure field
			6.7	
			6.6.2	



Table of Contents

1 Introduction	7
1.1 Purpose and Scope.....	7
1.2 References.....	9
1.2.1 Applicable Documents.....	9
1.2.1 Reference Documents.....	9
1.3 Abbreviations and Acronyms.....	11
2 GOME Instruments	12
2.1 Introduction.....	12
2.2 GOME/ERS-2.....	13
2.3 GOME-2/MetOp.....	13
2.4 Measurement Scenarios, Timelines and Instrument Modes.....	14
3 Algorithm Description	15
3.1 Summary.....	15
3.2 Trace Gas and Cloud Products.....	15
4 Processing	16
4.1 GOME/ERS-2.....	16
4.2 GOME-2/MetOp.....	16
4.3 Data Management.....	17
4.4 Quality Control and Monitoring.....	17
4.5 Geophysical Validation.....	18
4.6 User Services.....	18
5 Total Column Trace Gases and Cloud Products	19
5.1 Units.....	19
5.2 Geographical Coverage and Granularity.....	19
5.3 Spatial Resolution.....	19
5.4 Delivery Time.....	20
5.5 Expected Accuracy.....	20
5.6 Product Formats.....	21
5.7 File Name.....	21
5.8 Product Dissemination.....	22
5.8.1 GOME/ERS-2.....	22
5.8.2 GOME-2/MetOp.....	22
5.9 Product Ordering.....	23
5.9.1 GOME/ERS-2.....	23
5.9.2 GOME-2/MetOp.....	23
6 HDF5 Product Format Description	24
6.1 Structure.....	24
6.1.1 Description of Common Items.....	26
6.2 META_DATA Group.....	26



6.3 GEOLOCATION Group.....	29
6.4 TOTAL_COLUMNS Group.....	31
6.5 CLOUD_PROPERTIES Group.....	32
6.6 DETAILED_RESULTS Group.....	33
6.6.1 DETAILED_RESULTS/O3 Subgroup.....	34
6.6.2 DETAILED_RESULTS/NO2 Subgroup.....	34
6.6.3 DETAILED_RESULTS/SO2 Subgroup.....	35
6.6.4 DETAILED_RESULTS/H2O Subgroup.....	35
6.6.5 DETAILED_RESULTS/HCHO Subgroup.....	35
6.6.6 DETAILED_RESULTS/CHOCHO Subgroup.....	35
6.7 DETAILED_RESULTS_GODFIT Group.....	36
6.8 Detailed Flag Description.....	37
6.8.1 SurfaceConditionFlags.....	37
6.8.2 QualityFlags.....	37
6.8.3 NO2Tropo_Flags.....	38
6.8.4 SO2_Flags.....	38
6.8.5 H2O_Flags.....	38
6.8.6 HCHO_Flags.....	39
7 BUFR Product Format Description.....	40
7.1 Structure.....	40
7.2 WMO/GTS Bulletin Identifier.....	40
7.3 Section 0 - Indicator Section.....	41
7.4 Section 1 - Identification Section.....	41
7.5 Section 3 - Indicator Section.....	41
7.6 Section 3 - UPAS Level-2 Specific List of Descriptors.....	42
7.7 Section 4 - Indicator section.....	43
7.8 Section 5 - End Section.....	43
7.9 Trace Gas Table.....	43
8 Using the Products.....	44
8.1 Confidence Flags and Ancillary Fields.....	44
8.2 Software and Tools for reading the products.....	44
A Appendixes.....	45
A.1 HDF5 Data Types.....	45
A.2 Traceability Matrix of HDF5 Metadata to EECF Parameters.....	46
A.3 Traceability Matrix of HDF5 Metadata to UMARF Parameters.....	47

1 Introduction

1.1 Purpose and Scope

DLR has been producing on an operational basis a range of total column trace gases and cloud products for GOME/ERS-2 in the framework of ESA's D-PAF project. In the same way, DLR produces total column trace gases and cloud products for GOME-2/MetOp in the framework of EUMETSAT's O3M-SAF.

DLR has a long experience in operational processing of GOME data and has developed a generic software for this purpose: the Universal Processor for UV/VIS Atmospheric Spectrometers (UPAS) 9 system. This document is the user manual for the GOME/ERS-2 and GOME-2/MetOp total column trace gases and cloud products available at DLR.

In this document, the terms GOME/ERS-2 and GOME-2/MetOp are used to reference the specific instruments. The general term GOME applies to both sensors.

The trace gases total column products are:

- Ozone (O₃) total column
- Nitrogen dioxide (NO₂) total column
- Bromide monoxide (BrO) total column
- Sulphur dioxide (SO₂) total column
- Water vapour (H₂O) total column
- Formaldehyde (HCHO) total column
- Chlorine dioxide (OClO) total column
- Glyoxal (CHOCHO) total column

The trace gases tropospheric column products are:

- Nitrogen dioxide tropospheric column
- Ozone tropospheric column
- Bromide monoxide tropospheric column

Additionally DLR provides the following cloud properties derived from GOME measurements:

- Cloud fraction (CF)
- Cloud-top albedo (CTA) and cloud optical thickness (COT)
- Cloud-top height (CTH) and cloud-top pressure (CTP)



DLR provides near-real-time (NRT), off-line (OL), and reprocessed products. The NRT products have the same granularity as the input GOME data (i.e. downlink or PDU) and are made available and disseminated to the users within 2 hours 30 minutes of sensing. The OL products are consolidated orbits from ascending node crossing to ascending node crossing and are available and disseminated to the users two weeks (up to four weeks in case of GOME/ERS-2) after sensing.

Additionally, DLR provides reprocessed products for climate applications. The complete GOME/ERS-2 data record starting in 1995 has been reprocessed and validated on a regular basis using improved algorithms. In the same way, the complete GOME-2/MetOp data record starting in 2007 was already reprocessed and validated.

GOME/ERS-2 and GOME-2/MetOp provide a unique data record of atmospheric measurements covering a time frame of around 25 years. DLR together with the partner organizations ESA and EUMETSAT will assure the continuity between GOME/ERS-2 and GOME-2/MetOp total column products. In this framework it is important to provide to the users a unified data format for accessing the GOME products. The “Hierarchical Data Format” (HDF) and the “Binary Universal Form for the Representation of meteorological data” (BUFR) have been selected for the GOME total column products. HDF and BUFR are self-describing, machine-independent file formats commonly used for storage and transfer of scientific and meteorological data.

The present document is divided into the following sections:

- Overview of the GOME/ERS-2 and GOME-2/MetOp instruments including instrument modes
- Summary of the algorithms used for the retrieval of trace gases total columns and cloud properties
- Summary of the processing steps
- Product description including the used HDF5 and BUFR format
- Appendixes



1.2 References

1.2.1 Applicable Documents

- [A1] Design Document for the GOME-2 Universal Processor for Atmospheric Spectrometers, SAF/O3M/DLR/DD/001, Issue 2.0, October 2003
- [A2] EECF to PAF Interface Specifications, ER IS EPO GE 0102, Issue 3.0, January 1990
- [A3] UMARF to SAFs Interface Control Document, EUM/UMA/ICD/004, Issue 3.12, April 2006
- [A4] Product Requirements Document, SAF/O3M/FMI/RQ/PRD/001, Rev. 06, May 2008

1.2.1 Reference Documents

- [R1] P. Valks, D. Loyola, N. Hao, M. Rix, S. Slijkhuis, Algorithm Theoretical Basis Document for GOME-2 Total Column Products of Ozone, NO₂, BrO, SO₂, H₂O, HCHO, OClO, tropospheric NO₂ and Cloud Properties (GDP 4.5 for O3M-SAF OTO and NTO), DLR/GOME-2/ATBD/01, Iss./Rev. 2/E, 2011.
- [R2] R. Spurr, M. van Roozendaal, D. Loyola, C. Lerot, J. van Geffen, J. van Gent, C. Fayt, J.-C. Lambert, W. Zimmer, A. Doicu, S. Otto, D. Balis, M. Koukouli, C. Zehner, GDP 5.0 Upgrade of the GOME Data Processor for Improved Total Ozone Columns — Algorithm Theoretical Basis Document, DLR/GOME/ATBD/GDP5, Iss./Rev. 1B, August 2012.
- [R3] “Algorithm Theoretical Basis Document for GOME Total Column Densities of Ozone and Nitrogen Dioxide, UPAS/GDOAS: GDP 4.0”, ERSE-DTEX-EOPG-TN-04-0007, Iss./Rev. 1/A, December 2004.
- [R4] J.-C. Lambert, M. Koukouli, D. Balis, J. Granville, C. Lerot, and M. Van Roozendaal, GDP 5.0 Upgrade of the GOME Data Processor for Improved Total Ozone Columns — Validation Report, TN-IASB-GOME-GDP5-VR, Iss./Rev. 1B, August 2012.
- [R5] D. Balis, M. Koukouli, D. Loyola, P. Valks, N. Hao, GOME-2 O₃ total column validation report, SAF/O3M/AUTH/VR/O3/3, November 2009.
- [R6] J.-C. Lambert, G. Pinardi, J. Granville, K. Clemer, A. Delcloo, P. Valks, N. Hao,



GOME-2 NO₂ total column validation report, SAF/O3M/IASB/VR/NO2/095,
February 2011.

- [R7] J. van Geffen, M. Van Roozendael, M. Rix, P. Valks, GOME-2 SO₂ total column initial validation, TN-IASB-GOME2-O3MSAF-SO2-01.1, November 2008.
- [R8] M. Van Roozendael, N. Theys, N. Hao, P. Valks, GOME-2 BrO total column validation report, SAF/O3M/BIRA/VR/BRO/091, January 2009.
- [R9] N. Kalakoski, T. Wagner, K. Mies, S. Beirle, S. Slijkhuis, D. Loyola, GOME-2 H₂O total column validation report, SAF/O3M/FMI/VR/H2O/111, April 2011.
- [R10] "Delta Validation Report for ERS-2 GOME Data Processor upgrade to version 4.0", ERSE-CLVL-EOPG-TN-04-0001, Iss./Rev. 1.0, December 2004
- [R11] "Product Specification Document of the GOME Data Processor", ER-PS-DLR-GO-0016, Iss./Rev. 4/B, December 2004
- [R12] "GOME-2 Level 1 Product Format Specification", EPS/MIS/SPE/97232, 2008
- [R13] "GOME-2 Products Guide", EUM/OPS-EPS/MAN/05/0005, Issue 1.0, February 2005
- [R14] HDF5 File Format Specification <http://www.hdfgroup.org/HDF5/>
- [R15] BUFR Format Specification
<http://www.wmo.int/pages/prog/www/WDM/Guides/Guide-binary-1A.html>

1.3 Abbreviations and Acronyms

A list of abbreviations and acronyms used throughout this document is given below:

AAIA	Absorbing Aerosol Indicator Algorithm
AMF	Air Mass Factor
BIRA-IASB	Belgian Institute for Space Aeronomy
BUFR	Binary Universal Form for the Representation of meteorological data
CCSDS	Consultative Committee for Space Data Systems
DLR	Deutsches Zentrum für Luft- und Raumfahrt e.V. (German Aerospace Centre)
DOAS	Differential Optical Absorption Spectroscopy
D-PAF	German processing and archiving facility
DU	Dobson Unit
EPS	EUMETSAT Polar System
ERS-2	European Remote Sensing Satellite-2
ESA	European Space Agency
ESC	Effective Slant Column
EUMETSAT	European Organisation for the Exploitation of Meteorological Satellites
GDOAS	GODFIT-DOAS
GDP	GOME Data Processor
GOME	Global Ozone Monitoring Experiment
HDF	Hierarchical Data Format
IMF	Remote Sensing Technology Institute
MetOp	Operational Meteorological Satellite
NRT	Near-Real-Time
NT	Nominal-Time
NTO	Identifier used for near-real-time total column and cloud products
O3M-SAF	SAF on Ozone and Atmospheric Chemistry Monitoring
OL	Off-Line
OTO	Identifier used for off-line total column and cloud products
PDU	Product Dissemination Unit
PMD	Polarisation Measurement Device
RP	Postfix identifier user for reprocessed total column and cloud products
RMS	Root Mean Square
SAF	Satellite Application Facility
SZA	Solar Zenith Angle
TBD	To be Defined
TOA	Top of Atmosphere
UMARF	Unified Meteorological Archiving and Retrieval Facility
UV	Ultra Violet
UPAS	Universal Processor for UV/VIS Atmospheric Spectrometers
UTC	Universal Time Coordinate
VCD	Vertical Column Density
VIS	Visible

2 GOME Instruments

2.1 Introduction

The Global Ozone Monitoring Experiment (GOME) is a scanning spectrometer that captures light reflected from the Earth's surface and atmosphere. The spectrometer splits the light into its spectral components covering the UV/VIS region from 240 nm to 790 nm at a resolution of 0.2 nm to 0.4 nm.

The measured spectra are mainly used to derive ozone total column and vertical profile, nitrogen dioxide, bromine oxide, water vapour, oxygen, sulphur oxide and other trace gases, as well as cloud properties and aerosols.

The next figure shows a schematic representation of GOME optical layout. A scan mirror (26) directs the light emitted from the Earth's atmosphere or the Sun diffuser (24) into the instrument. The spectrometer splits incoming light into four channels (11, 12, 18, 19) using a complex array of telescopes (5, 25), prisms (4, 6) and gratings (8, 9, 20, 21). Detectors at the end of each optical path (13 to 16) collect information about the signal in each channel.

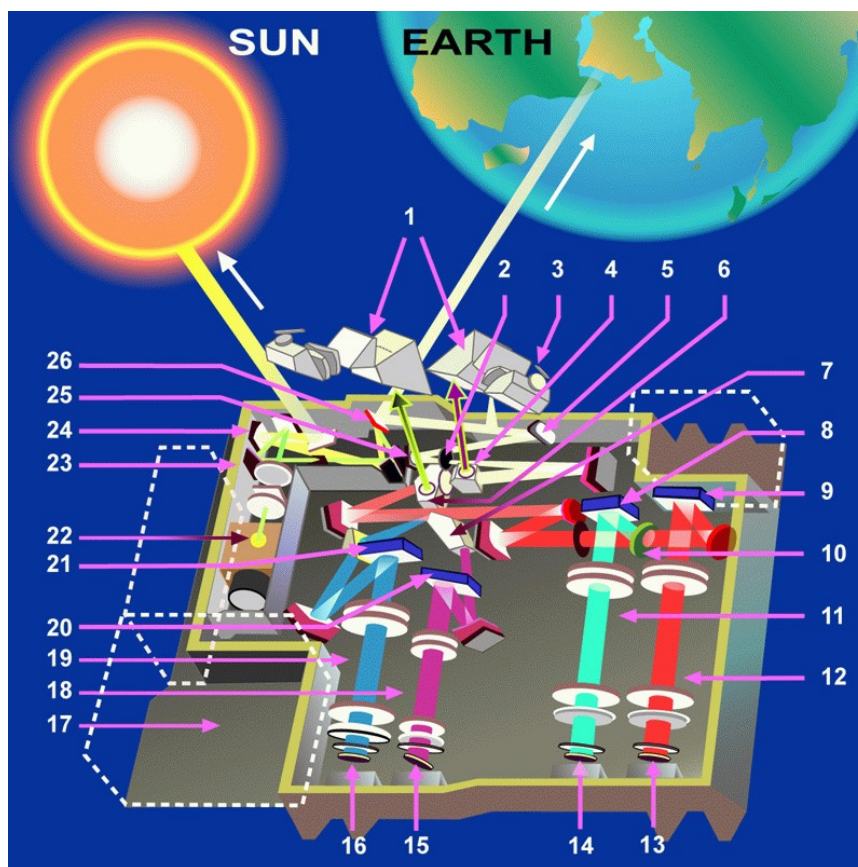


Figure 1: GOME optical layout (courtesy of ESA/ESTEC)



2.2 GOME/ERS-2

In June 1990, the ESA Council approved the satellite project to follow the first European Remote Sensing Satellite (ERS-1). The ERS-2 satellite was intended to provide data continuity between ERS-1 and the European polar platforms. ERS-2 was launched on 21 April 1995.

In addition to the ERS-1 mission objectives, ERS-2 was scheduled to make a significant contribution to atmospheric chemistry. To meet this need, ERS-2 carried GOME, an instrument designed to measure a range of atmospheric trace constituents in the troposphere and stratosphere.

GOME/ERS-2 is a nadir viewing spectrometer, which in its normal mode scans across track in three steps. The field of view of each step may be varied in size from 40 km x 40 km to 320 km x 40 km, with five options allowed. The mode with the largest footprint (three steps with a total coverage of 960 km x 40 km) provides global coverage at the equator within 3 days.

DLR developed the GOME Data Processor (GDP) system, the operational ground segment for GOME/ERS-2. GDP incorporates a Level 0-to-1 processing chain, the complete GOME/ERS-2 data archive, a DOAS-based total column retrieval process (Level 1-to-2), and processing chain for the generation of value added products.

2.3 GOME-2/MetOp

On 30 January 1998, the ESA Earth Observation Programme Board gave its final go-ahead for the MetOp Programme. The instruments on the MetOp satellites are designed to produce high-resolution images of the Earth's surface, vertical temperature and humidity profiles, and temperatures of the land and ocean surface on a global basis. In addition, there are instruments for monitoring trace gases and wind flow over the oceans. This instrument payload is of significant value to meteorologists and other scientists, particularly to those studying the global climate.

Given the need for global-scale routine monitoring of the abundance and distribution of ozone and associated trace gas species, a proposal was put forward for the inclusion of GOME-2 on the MetOp satellites. MetOp-A was launched on 19 October 2006 as part of the Initial Joint Polar System (IJPS) in co-operation with NOAA in the USA.

The GOME-2/MetOp field of view of each step may be varied in size from 5 km x 40 km to 80 km x 40 km. The mode with the largest footprint (twenty four steps with a total coverage of 1920 km x 40 km) provides daily near global coverage at the equator 10.

Based on the successfully work with the GOME Data Processors, the German Aerospace Centre (DLR) plays a major role in the design, implementation and operation of the GOME-2/MetOp ground segment for total column products. DLR is a partner in the Satellite Application Facility on Ozone and Atmospheric Chemistry Monitoring (O3M-SAF), which is part of the Eumetsat Polar System (EPS) ground segment, and is responsible in this project for the generation of total column amounts of the various trace gases and cloud properties which may be retrieved from GOME-2/MetOp level 1b products.



2.4 Measurement Scenarios, Timelines and Instrument Modes

GOME/ERS-2 and GOME-2/MetOp follow in general the same operational scenarios, see

<http://gome.eumetsat.int>

<http://www.eumetsat.int/EPSCalValExtranet/Main/GOMECalVal/index.htm>

for more details.

- Earth Observation Mode

This mode includes nadir/narrow/static/north-polar/south-polar scanning measurements with various integration times depending on solar zenith angle. This is the default mode for the day side. Only the data acquired in this mode are used for geophysical retrievals.

- Calibration Modes

This mode includes Sun/Moon/dark/spectral-light/LED/white-light measurements. Most of this calibrations are performed on the night side.

The effective optical throughput and the potential data rate for GOME-2/MetOp are much higher than those for GOME/ERS-2¹. The default integration times for GOME-2/MetOp is 4 to 8 times smaller than those for GOME/ERS-2.

¹ The effective optical throughput is enhanced by approximately a factor of 2, and co-adding (as used for GOME/ERS-2) is not required because of the higher data rate (10 times faster).

3 Algorithm Description

3.1 Summary

The GOME Data Processor (GDP) operational algorithm is the baseline algorithm for the trace gas column retrievals from GOME/ERS-2 and GOME-2/MetOp. The GDP 4.x uses an optimised DOAS (Differential Optical Absorption Spectroscopy) algorithm to determine the trace gas slant column. The DOAS slant column fitting is followed by Air Mass Factor (AMF) conversions to generate vertical columns. Cloud information used in the trace gas retrieval is obtained with the OCRA and ROCINN algorithms. The latest development GDP 5 uses the GODFIT algorithm for the retrieval of total ozone from GOME/ERS-2. A detailed description of the GDP algorithms are given in [R1], [R2] and [R3].

3.2 Trace Gas and Cloud Products

The GOME/ERS-2 and GOME-2/MetOp trace gas column densities and cloud properties (level-2 product) are retrieved from GOME (ir)radiance and PMD data (level-1 product). The following table lists the trace gas column and cloud products provided by DLR, and the corresponding wavelength regions used for the retrieval.

<i>Product</i>	<i>Wavelength region (nm)</i>
O ₃ column	325.0-335.0
NO ₂ column	425.0-450.0
BrO column	336.0-351.5
SO ₂ column	315.0-326.0
H ₂ O column	611.0-700.0
HCHO column	328.5-346.0
OCIO column	365.0-389.0
CHOCHO column	435.0-460.0
Cloud fraction	300-800 (PMD-p)
Cloud-top height (pressure) and albedo (cloud optical thickness)	758.0-771.0



4 Processing

The Universal Processor for UV/VIS Atmospheric Spectrometers (UPAS) is the core GOME retrieval system at DLR [A1]. UPAS is a new-generation Level 2 system for the processing of operational near-real-time and off-line trace gas and cloud properties products. UPAS takes as input the calibrated and geolocated Level 1 radiances from different sensors (e.g. GOME/ERS-2 and GOME-2/MetOp) and produces total columns of trace gases (e.g. O₃, NO₂, BrO, H₂O, SO₂, HCHO and OCIO) and cloud properties (cloud fraction, cloud-top albedo and height).

The UPAS system is based on a scalable client/server architecture, which makes it possible to run the system with an unlimited number of processing nodes. The average UPAS processing time for O₃, NO₂, and cloud retrieval includes ~15% on pre-processing tasks, ~15% on DOAS, ~60% on explicit calls to the radiative transfer model LIDORT for AMF calculations, and the rest on Level 1 loading and other tasks. The reprocessing of one year of GOME/ERS-2 data can be done in just one day using 10 processing cores.

4.1 GOME/ERS-2

DLR has a processing chain for GOME/ERS-2 NRT and OL total column products that is being used operationally since 1995. It includes data ingestion, from level 1 to level 4 product generation, quality control, product archiving, data dissemination, and ordering.

The operational products from GOME are total ozone and NO₂ using GDP-5.0. In GDP-5.0 the new GODFIT algorithm for total ozone developed by BIRA/RTS/DLR and the DOAS algorithm for NO₂ are used. See [R2] and [R3].

GOME/ERS-2 images and value added products produced at DLR are available at <http://atmos.eoc.dlr.de/gome>.

4.2 GOME-2/MetOp

DLR has developed the operational processing chain for GOME-2/MetOp total column products. The level 1b products are generated at the EPS ground segment in EUMETSAT [R13] and received at DLR via EUMETCast. DLR generates GOME-2/MetOp level 2 total column and cloud products using UPAS.

There are different modules for quality control and monitoring, production control, archiving and order handling. The level 2 products generated at DLR are validated on a regular basis by the O3M-SAF partner institutes AUTH, BIRA, and FMI. The GOME-2/MetOp level 2 NRT products are disseminated primary with EUMETCast, WMO/GTS and internet. The off-line products are disseminated via Internet and media. The ordering of products can be done via dedicated user services.

The GOME-2/MetOp level 1 products are delivered in NRT (approx. 1:45 hours after sensing) in so called PDU files (product dissemination unit) containing 3 minutes of measurements via EUMETCast. The ground-segment at DLR needs less than 15 minutes for acquiring the input data, retrieving the trace gas total columns and disseminating the resulting level 2 products (Figure 2), that means the GOME-2/MetOp total column products are available to the users in less than 2 hours after sensing.

The GOME-2/MetOp operational processing is performed in a high availability virtualized environment on a blade center farm.

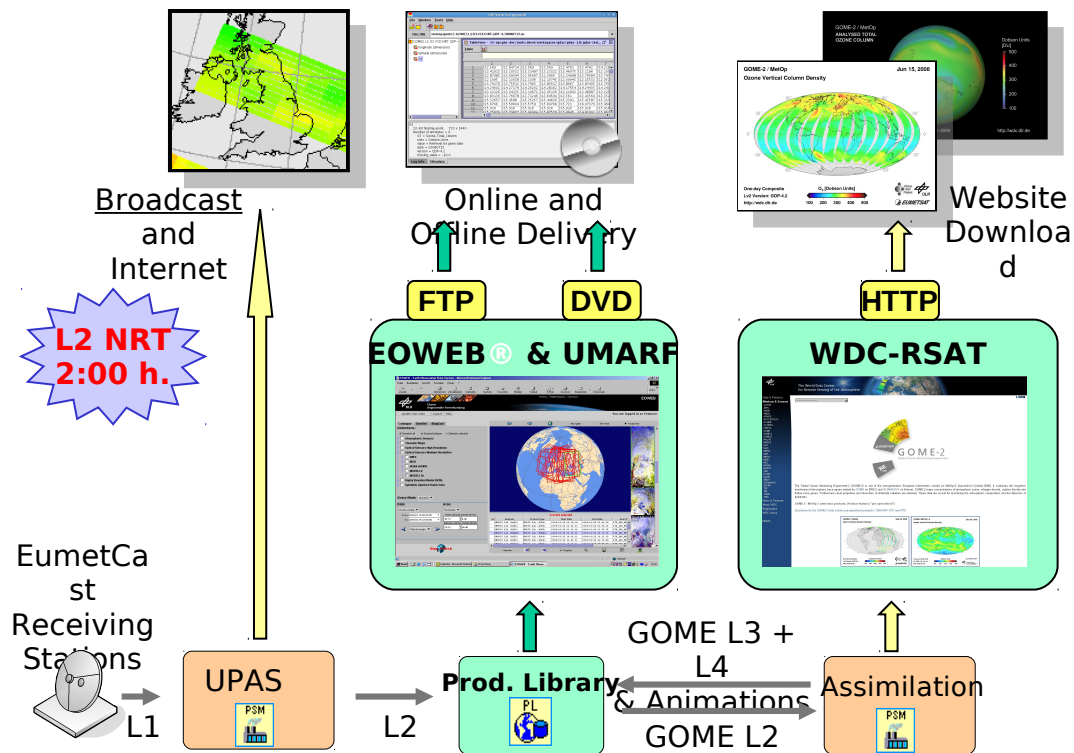


Figure 2: GOME-2/MetOp processing chain

4.3 Data Management

The processing of GOME-2/MetOp data is embedded in DLR's multi-mission facility ensuring high availability and sustainability. The German National Remote Sensing Data Library stores the data for the long-term enabling monitoring of global change and data reprocessing based on enhanced methodology.

Information and data of O3M-SAF products generated at DLR are disseminated through different channels: through direct FTP-push to authorized users and through the EUMETCast broadcast system for near-real-time users, through the EUMETSAT user services and by individual ordering and delivery through DLR's on-line user services EOWEB® (Figure 2).

4.4 Quality Control and Monitoring

The quality of the OL products is controlled before they are archived and disseminated to the users. A dedicated quality control tool integrated into DLR's data management system displays a set of parameters generated automatically by UPAS for each processed orbit. The quality control tool performs limit checks and computes some statistics to show the confidence levels of the product and its evolution within time.

4.5 Geophysical Validation

The geophysical validation of the official GOME products is performed by independent partner organizations: AUTH, BIRA, and FMI. The validation is accomplished using ground-based measurements available through the World Ozone and Ultraviolet radiation Data Centre, ground-based measurements from the NDACC network, other satellite data, as well as data assimilation techniques. The validation results are publicly available on the Internet, see section 5.9.

4.6 User Services

Information about data and services are accessible through the websites given in section 5.9 and at the end of this section.

The interactive catalogue and ordering interface EOWEB® from DLR allows individual product searches and ordering.

Catalogue information from the O3M-SAF products generated at DLR are regularly made available to the central EUMETSAT facility UMARF. The users can query the catalogue of the UMARF and submit their request, the UMARF facility will then send to each SAFs orders requested by the end users about SAF products catalogued in UMARF. DLR's data management system will then deliver the requested products to the user.

DLR operates additionally on-line user services on remote sensing data in the framework of the World Data Center for Remote Sensing of the Atmosphere (WDC-RSAT <http://wdc.dlr.de>, left side of Figure 2).

GOME-2/MetOp images and value added products produced at DLR and partner organizations are available at <http://atmos.eoc.dlr.de/gome2>, see Figure 3.

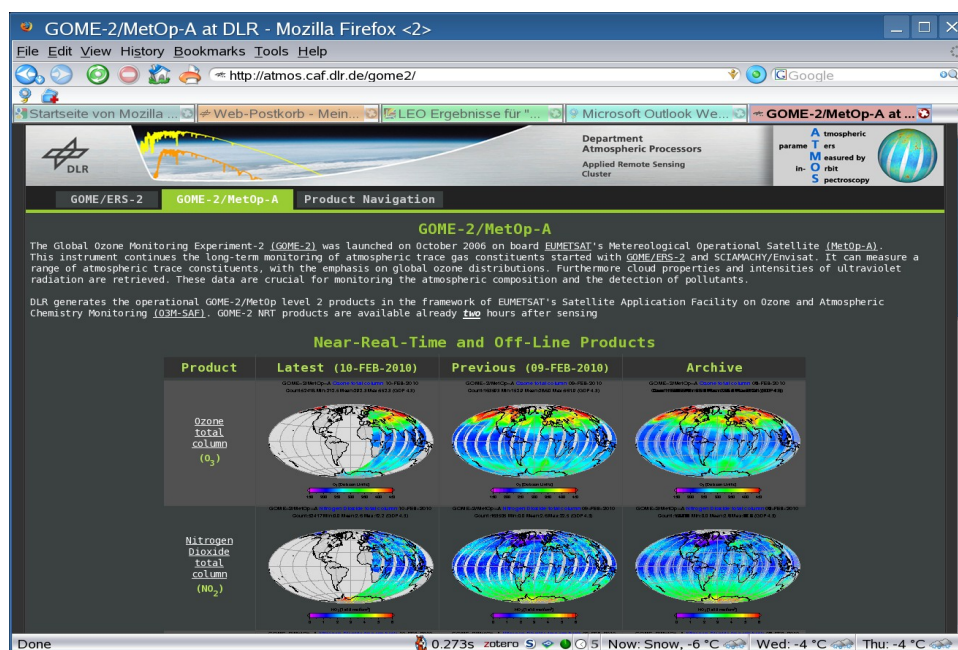


Figure 3: GOME-2/MetOp web page at DLR

5 Total Column Trace Gases and Cloud Products

The level 2 total column products generated with the UPAS system contain retrieved trace gas vertical columns and cloud properties, as well as other geophysical parameters; corresponding errors on these quantities, and a number of additional diagnostics, quality flags and intermediate results.

5.1 Units

Dataset	Units
Total ozone and SO ₂ column amount	Dobson Units [DU]
Total H ₂ O column amount	[kg/m ²]
Other trace gas column amounts	[molecules/cm ²]
Cloud fraction and cloud-top albedo (optical thickness)	(unitless) [-]
Height	[km]
Pressure	[hPa]
Angles are given at Top-of-Atmosphere (70 km)	[0 to 360 degrees]
Geographical Coordinates	longitude [0 to 360 degrees] latitude [-90 to +90 degrees]
Errors	relative values [%]

5.2 Geographical Coverage and Granularity

GOME/ERS-2 has a nominal global coverage at the equator after three days. GOME-2/MetOp has a daily near global coverage at the equator. Depending on the scanning mode used, the measured ground pattern may be different.

The NRT, operational OL and reprocessed products have by default a global coverage. The coverage of trace gases available only under special conditions may be reduced, e.g. SO₂ measured during volcanic eruption.

The NRT products have the same granularity as the downlink or PDU. The OL and reprocessed products are consolidated orbits from ascending node to ascending node.

5.3 Spatial Resolution

GOME/ERS-2 has three forward-scan pixels with a nominal resolution of 40 km x 320 km, and one back-scan pixel with a nominal resolution of 40 km x 960 km.

GOME-2/MetOp has 24 forward-scan pixels with a nominal resolution of 40 km x 80 km, and 8 back-scan pixels with a nominal resolution of 40 km x 240 km.

Both forward- and back-scan pixels are generally processed and written to the products.

5.4 Delivery Time

DLR generates near-real-time (NRT), off-line (OL), and reprocessed products (RP). The NRT products are available for distribution in less than 15 minutes after the reception of the GOME level 0 or level 1 product.

Assuming that the input data is received at DLR 1:45 hours after sensing, then the GOME total column products will be disseminated to the users in less than 2 hours after sensing.

The GOME-2/MetOp OL products are available two weeks after sensing. The GOME/ERS-2 OL products are available up to four weeks after sensing due to constraints on the current level 0 data dissemination.

Reprocessed GOME/ERS-2 and GOME-2/MetOp level 2 products using the latest level 1 data and improved retrieval algorithms are available on a regular basis.

5.5 Expected Accuracy

The following table lists the GOME total column trace gases and cloud products provided by DLR together with estimated uncertainties.

<i>Product</i>	<i>Acronym</i>	<i>Expected Accuracy</i>	<i>Expected Precision</i>
Total ozone column,	O3	3.6-4.3% (SZA < 80°) 6.4-7.2% (80° < SZA < 90°), see [R4] and [R5]	2.4-3.3% (SZA < 80°) 4.9-5.9% (80° < SZA < 90°)
Tropospheric ozone column	O3Tropo	20-40%	20-40%
Total NO ₂ column	NO2	5-15% (unpolluted conditions), see [R6]	3-15% (unpolluted conditions)
Tropospheric NO ₂ column	NO2Tropo	40-80% (polluted conditions) > 100% (unpolluted), see [R6]	40-80% (polluted conditions) > 100% (unpolluted)
Total BrO column	BrO	20-50%, see [R8]	10-50%
Total SO ₂ column	SO2	50-100% (SZA < 70°) >100% (SZA > 70°), see [R7]	20-50% (SZA < 70°) >50% (SZA > 70°)
Total H ₂ O column	H2O	10-25%, see [R9]	5-20%
Total HCHO column,	HCHO	50-100% (polluted conditions) > 100% (unpolluted)	20-50% (polluted conditions) > 100% (unpolluted)
Total OCIO column	OCIO	50-100% (SZA > 75°)	20-50% (SZA > 75°)
Total CHOCHO column	CHOCHO	TBD	TBD
Cloud fraction	CF	< 10%	< 10%
Cloud-top height (cloud-top pressure)	CTH (CTP)	< 10%	< 10%
Cloud albedo (cloud optical thickness)	CTA (COT)	< 10%	< 10%

NRT and OL products have the same accuracy and precision.



5.6 Product Formats

The format of the product file is either HDF5 or BUFR. A detail description of the HDF5 product format is given in section 6 on page 24, and for the BUFR product in section 7 on page 40.

5.7 File Name

The file name of a product already contains important information about the dataset including trace gases and sensing time. It is built according to the following structure:

```
SENSOR_GAS_LV_YYYYMMDDhhmmss_ddd_MISSION_#####_PRO_RV.TYPE
```

where

- *SENSOR* denotes the instrument, i.e. GOME
- *GAS* is a “-” separated list of trace gases included in the product. The acronyms from the above table are used, e.g. “O3-NO2-BrO” is a products containing these three trace gases.
- *LV* is the product level, i.e. L2
- *YYYYMMDD* are the year, month and day of the first processed ground pixel
- *hhmmss* are the hours, minutes and seconds of the UTC time stamp of the first processed ground pixel
- *ddd* is the three digit duration of the product in minutes
- *MISSION* denotes the mission: ERS2, METOPA, METOPB, METOPC
- *#####* is the five digit orbit number
- *PRO* is the processing center, i.e. DLR
- *RV* is the two digit product revision
- *TYPE* denotes the product format used: HDF5 or BUFR

For example, the following identifier denotes a GOME/ERS-2 off-line product:

```
GOME_O3-NO2_L2_20060723165752_023_ERS2_58855_DLR_05.HDF5
```

The following example is a valid name for a GOME-2/MetOp off-line product:

```
GOME_O3-NO2-BrO_L2_20070302111155_047_METOPA_01900_DLR_01.HDF5
```

Note: The GOME-2/MetOp NRT products disseminated via EUMETCast have a fixed prefix file name: S-O3M_, see the following example:

```
S-O3M_GOME_O3_L2_20070302111155_003_METOPA_01900_DLR_01.BUFR
```



5.8 Product Dissemination

5.8.1 GOME/ERS-2

GOME/ERS-2 products are available at the D-PAF FTP-server:

`eo-dp.eo.esa.int`

The products are organized in directories as follows:

`products/level_2_HDF5/YYYY/MM/DD`

where *YYYY* is the year, *MM* the month, *DD* the day.

For requesting a FTP user account see 5.9.1.

5.8.2 GOME-2/MetOp

The primary dissemination mean of GOME-2/MetOp NRT products is EumetCast using the BUFR and HDF5 format.

The NRT products in BUFR format are additionally disseminated via WMO/GTS. The corresponding bulletin identifier for the O3M-SAF Products is:

Region	RTH	Country	TTAAii	CCCC	CodeForm
6	OFFENBACH	GERMANY	IUCX01	EDLR	FM 94-XIII

Additionally the GOME-2/MetOp NRT and OL (including reprocessed) products in HDF5 format are available at the DLR atmos FTP-server:

`ftp://atmos.eoc.dlr.de/gome2nrt`
`ftp://atmos.eoc.dlr.de/gome2nt`
`ftp://atmos.eoc.dlr.de/gome2ol`

The products are organized in directories *YYYY/MM/DD* where *YYYY* is the year, *MM* the month, *DD* the day.

For requesting a FTP user account see 5.9.2. Additionally, the NRT and OL products can be directly pushed to dedicated FTP servers located at the user's premises.

Following the O3M-SAF strategy, reprocessed products replace off-line products in the local archive and FTP server. The reasoning behind is that the reprocessed products are the best possible products and their quality is at least as good as the off-line products.

5.9 Product Ordering

5.9.1 GOME/ERS-2

GOME/ERS-2 total column products are generated at DLR's D-PAF on behalf of ESA.



For ordering/registration please contact:

ESA ESRIN - EO Help Desk
eohelp@esa.int

Current and historical quicklook images as well as value added products generated by DLR are available at:

<http://atmos.eoc.dlr.de/gome>

5.9.2 GOME-2/MetOp

The GOME-2/MetOp total column products are generated at DLR in the framework of EUMETSAT's O3M-SAF.



For information and access to all O3M-SAF products, please refer to the O3M-SAF web page and help desk:

O3M-SAF Web page
<http://o3msaf.fmi.fi>

O3M-SAF Helpdesk
o3msaf@fmi.fi

Additional information can be found in EUMETSAT's product Navigator accessible through the following link:

<http://navigator.eumetsat.int>

Current and historical quicklook images as well as value added products generated by DLR are available at:

<http://atmos.eoc.dlr.de/gome2>

6 HDF5 Product Format Description

The product content comprises the following groups:

- *META_DATA*
 - Product Metadata
- *GEOLOCATION*
 - Date & Time (all retrievals)
 - 4 Corner Coordinates & Centre of Ground Pixel
 - Solar, Line-of-Sight Zenith, and relative Azimuth angles at TOA
 - Orbit information
- *TOTAL_COLUMNS*
 - Total and tropospheric column amounts of the various trace gases with corresponding (relative) errors
- *CLOUD_PROPERTIES*
 - Retrieved cloud properties
- *DETAILED_RESULTS*
 - Geophysical parameters (surface, cloud and aerosol values)
 - Vertical column, slant column, ghost column and AMF values with corresponding errors
 - Fitting diagnostics (chi-square, RMS, etc.)
 - Various subgroups for trace gas specific data (e.g. O₃, NO₂Tropo, SO₂)

6.1 Structure

The data in the HDF5 file is organized in five groups: *META_DATA*, *GEOLOCATION*, *TOTAL_COLUMNS*, *DETAILED_RESULTS*, *CLOUD_PROPERTIES* (Figure 4). The values in all groups are either copied from the level 1 ([R11], [R12]) or other input data, or calculated by the UPAS level 1-to-2 processor. The *META_DATA* group contains parameters required by EECF [A2] or UMARF [A3], and general information about the product. The data related to each ground pixel is divided into three groups: *GEOLOCATION*, *TOTAL_COLUMNS* and *DETAILED_RESULTS*. The *GEOLOCATION* group contains all information related to geolocation of the pixel. Pixel processing information is stored in the *TOTAL_COLUMNS* and *DETAILED_RESULTS* groups. Cloud properties derived are stored in the *CLOUD_PROPERTIES* group. The last three groups mentioned above contain all pixel information, stored in arrays with length equal to the number of ground pixels in one granule (orbit or PDU). Data values may occur more than once for a given ground pixel, and these will be separated by fitting windows. The information for each entry is stored as a matrix. Elements in these matrices

are not always atomic: they can contain variable length data structures. When entries for a pixel or pixel-window combination cannot be calculated using the normal processing procedure, “fill-in” values are written to the arrays. Also, not all datasets defined here have to exist in every product.

Please note that this description is only valid for the actual version of the product format, currently 2/E. The version of a GOME HDF5 level 2 product can reliably be read from the field *META_DATA/ProductFormatVersion*, therefore a reader can implement several versions in parallel.

Each array has five attributes: *Title*, *Unit*, *FillValue*, *ValueRangeMin* and *ValueRangeMax* (Figure 4). These are used to describe the contents of the array. Values in the *META_DATA* group are stored as attributes of the group.

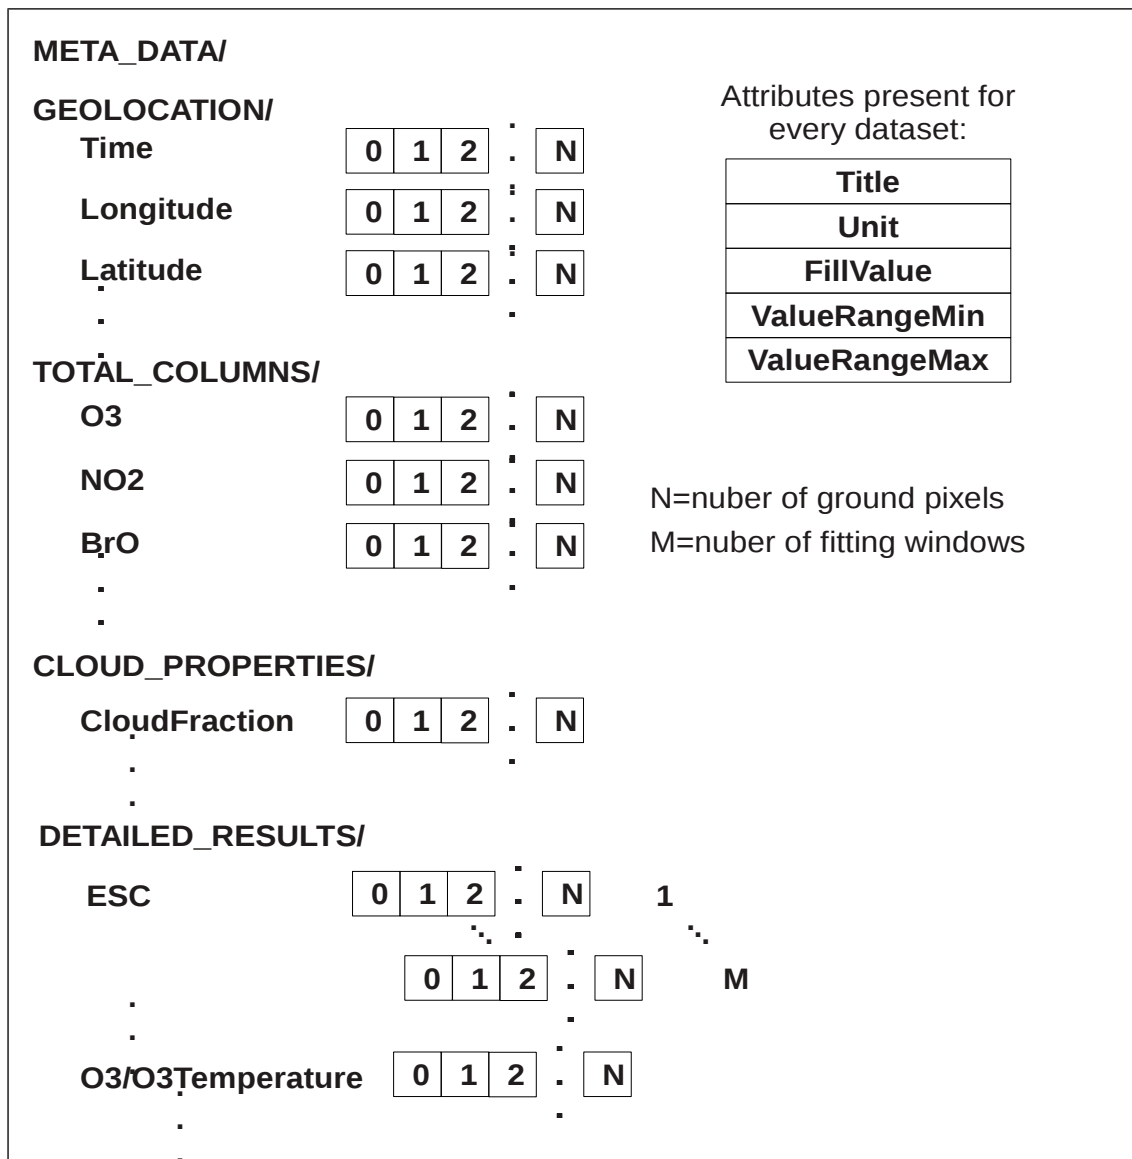


Figure 4: Organization of the GOME total column products in the HDF5 structure



6.1.1 Description of Common Items

In the *GEOLOCATION* and *TOTAL_COLUMN* groups, all datasets have a set of attached attributes. These are shown in the table below.

<i>Attribute Name</i>	<i>Data Type</i>	<i>Description</i>
Title	string	Description of the dataset, e.g. "Ozone total column"
Unit	string	Unit of the values in the array, e.g. "DU"
FillValue	same as dataset	Value in the array, if actual data value is missing
ValueRangeMin	same as dataset	Minimum value in this dataset (present only when applicable)
ValueRangeMax	same as dataset	Maximum value in this dataset (present only when applicable)

6.2 META_DATA Group

The content of the *META_DATA* group is shown in the following tables. Allowed values for parameters required by EECF and UMARF are consistent with requirements given in [A2] and [A3]. Allowed values specified in italics indicate any value of the given type (e.g. *string* means that the attribute can contain any string within the UMARF size limit)

<i>Attribute Name</i>	<i>Data Type</i>	<i>Description</i>	<i>Allowed Values GOME/ERS-2</i>	<i>Allowed Values GOME-2/Metop</i>
ArchiveFacility	string	Centre where the data is archived.	D-PAF DLR OP	O3DLR
SatelliteID	string	Platform identifier (mission and spacecraft).	ERS-2	<i>Mnn</i>
StartOrbitNumber	integer	Orbit number at the start of sensing, i.e. at the beginning of a dump.	<i>integer</i>	<i>integer</i>
InstrumentID	string	Instrument which acquired the product	GOME	GOME
InstrumentMode	VIEW_MODES structure	Specifies how many ground pixels were observed in the corresp. view modes.	<i>VIEW_MODES structure</i>	<i>VIEW_MODES structure</i>
SensingStartTime	CCSDS_ASCII	UTC date and time at sensing start.	<i>Date in CCSDS format (ASCII)</i>	<i>Date in CCSDS format (ASCII)</i>
SensingEndTime	CCSDS_ASCII	UTC date and time at sensing end.	<i>Date in CCSDS format (ASCII)</i>	<i>Date in CCSDS format (ASCII)</i>
ReceivingCentre	string	Centre that received the data.	KS, GS, DP, ES, MS	ECF (for EECF), FBK, FUC, GCA, PGS, RUS, SOC, SVL, UBI, WAL, WEC, WIV
ProcessingCentre	string	Centre that generated the data.	D-PAF DLR OP	O3DLR
ProcessingMode	string	Processing mode applied for generation of the product.	N (nominal), B (backlogged), R (reprocessed), V (validation) T (near-real-time)	N (nominal), B (backlogged), R (reprocessed), V (validation) T (near-real-time)
Revision	string	Global product revision, required e.g. for reprocessing, part of logical product identifier.	<i>string</i>	<i>string</i>
ProductType	string	Description of the product type	ERSNTO, ERSOTO	O3MNTO, O3MOTO



<i>Attribute Name</i>	<i>Data Type</i>	<i>Description</i>	<i>Allowed Values</i>
ProcessingLevel	string	Processing level applied for generation of the product.	02
ProcessingTime	CCSDS_ASCII	UTC date and time at processing finish.	CCSDS Date
BaseProductAlgorithmVersion	string	Version of the algorithm used to generate the L1B parent product upon which the L2 product is based.	string
BaseProducts	string	Name of the base products.	string
ProductAlgorithmVersion	string	Version of the algorithm that produced the product.	string
InitializationFileVersion	string	Version of the configuration file used for processing.	string
InternalProcessorRevision	string	Version of the processor used to generate this product.	string
ProductFormatType	string	Data format of the product.	"HDF5"
ProductFormatVersion	string	Version number of the product format.	string
ProductContents	string	Trace gases included in the product (comma-separated list).	string
SubsettingRegion	string	Description of the sub setting region. "full" means: no subsisting was applied.	string
SubSatellitePointStartLat	float	Latitude of the sub-satellite point at start of acquisition. (For EPS products: either the first measurement or first complete scan start point (tbd), at start of dataset.)	-90... 90
SubSatellitePointStartLon	float	Longit. of the sub-satellite point at start of acquisition.	0... 360
SubSatellitePointEndLat	float	Latitude of the sub-satellite point at end of acquisition.	-90... 90
SubSatellitePointEndLon	float	Longit. of the sub-satellite point at end of acquisition.	0... 360
SatellitePosition	POS_VEC	Position vectors (X,Y,Z) in km	Vector in POS_VEC
SatelliteVelocity	POS_VEC	Velocity vector (dx/dt, dy/dt, dz/dt) in km/s	Vector in POS_VEC
OrbitSemiMajorAxis	float	Semi-major axis (km)	float
OrbitEccentricity	float	Excentricity	float
OrbitInclination	float	Inclination (deg)	float
OrbitRightAscOfAscNode	float	Right asc. of asc. node (deg)	float
OrbitArgumentOfPerigee	float	Argument of perigee (deg)	float
OrbitMeanAnomaly	float	Orbit mean anomaly (deg)	float
OrbitUTCDaysSince1950	integer	UTC days since 1.1.1950	int
OrbitMsSinceMidnight	integer	UTC ms since midnight	int
OrbitAscendingNodeCrossingDate Time	CCSDS_ASCII	Ascending node crossing UTC date and time	CCSDS Date
OrbitAscendingNodeLongitude	float	Ascending node longitude	-180... 180 (UMARF notation)
OrbitActualDuration	integer	Orbit duration in minutes, only counting valid pixels	0...~60
SolarSpectraDate	CCSDS_ASCII	Date and time of the solar spectra	CCSDS Date
NumberOfGroundPixels	integer	Number of ground pixels in the product	int
DegradedRecordCount	integer	Number of records which could not be processed	int
DegradedRecordPercentage	integer	Percentage of records, which could not be processed	0-100%
MissingDataCount	integer	Number of missing data records.	int
MissingDataPercentage	integer	Percentage of missing data records.	0-100%



The next table contains metadata specific to the total column products.

<i>Attribute Name</i>	<i>Data Type</i>	<i>Description</i>	<i>Allowed Values</i>
NumberOfFittingWindows	integer	Number of fitting windows used in processing	1- M

This table describes data sets containing information about the fitting windows:

<i>Dataset Name</i>	<i>Data Type</i>	<i>Description</i>	<i>Allowed Values</i>
FWName	string[windows]	Names of fitting windows	string
FWLowerBound	float[windows]	Lower wavelength bound of a fitting window in nm	240-780
FWUpperBound	float[windows]	Upper wavelength bound of a fitting window in nm	240-780
MainSpecies	string[windows]	Name of the main reference species retrieved in this fitting window	string
VCDQualityIndicator	float[windows]	Percentage of flagged pixels (see QualityFlags 0-2 in 6.8.2) for this window	0-100%

6.3 GEOLOCATION Group

The *GEOLOCATION* group contains information for seven different points for the ground pixel, denoted by letters A to G in Figure 5.

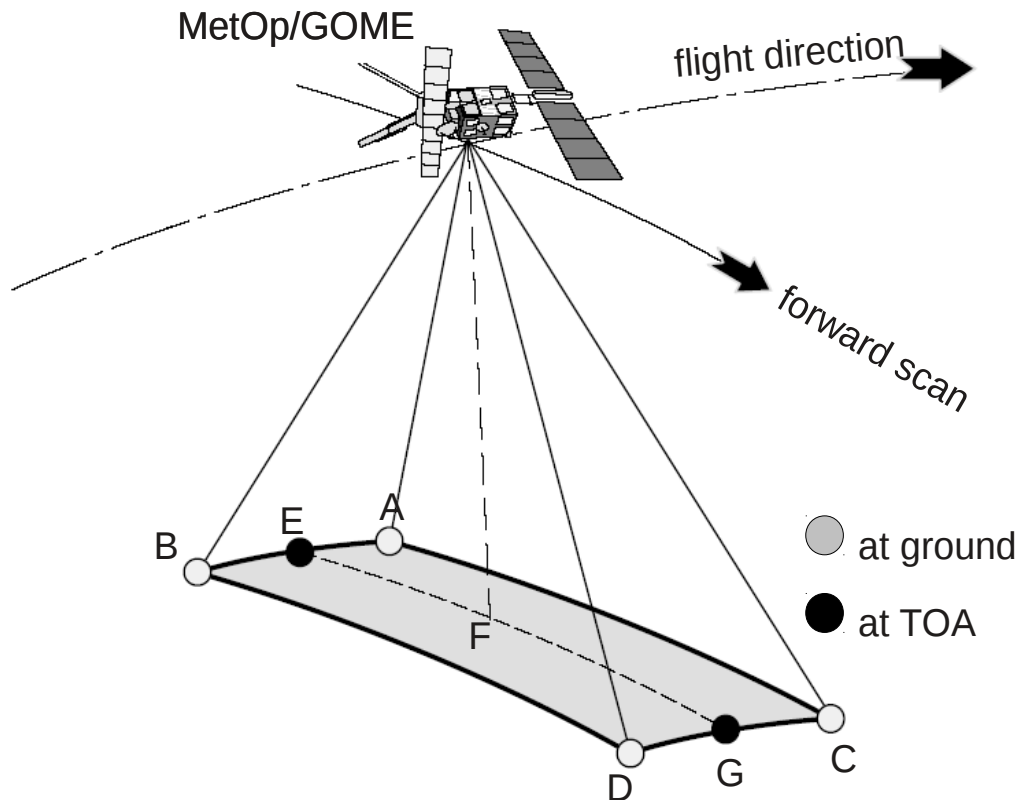


Figure 5: Ground Pixel Geometry

The term "pixels" denote the number of ground pixels, whereas the term "PMDpixels" denote the total number of PMD subpixels.

The data sets in the *GEOLLOCATION* group are given in the following table:

<i>Dataset Name</i>	<i>Data Type</i>	<i>Unit</i>	<i>Description</i>
InternalPixelId	integer[pixels]	-	Internal ground pixel number
Time	UTC[pixels]	ms	Time of the observation in UTC format
LongitudeCentre	float[pixels]	degrees	Longitude of the centre of the ground pixel (Point F)
LatitudeCentre	float[pixels]	degrees	Latitude of the centre of the ground pixel (Point F)
LongitudeA	float[pixels]	degrees	Longitude (Point A)
LatitudeA	float[pixels]	degrees	Latitude (Point A)
LongitudeB	float[pixels]	degrees	Longitude (Point B)
LatitudeB	float[pixels]	degrees	Latitude (Point B)
LongitudeC	float[pixels]	degrees	Longitude (Point C)
LatitudeC	float[pixels]	degrees	Latitude (Point C)
LongitudeD	float[pixels]	degrees	Longitude (Point D)
LatitudeD	float[pixels]	degrees	Latitude (Point D)
PMDCenterLon	float[PMDpixels]	degrees	Longitude (Point F) of forward scan PMD subpixel center
PMDCenterLat	float[PMDpixels]	degrees	Latitude (Point F) of forward scan PMD subpixel center
PMDPixelMap	integer[pixels]	-	Mapping from ground pixel to PMD pixel (-1 for backscan)
SolarZenithAngleE	float[pixels]	degrees	Solar zenith angle at TOA (Point E)
SolarZenithAngleCentre	float[pixels]	degrees	Solar zenith angle at TOA (Point F)
SolarZenithAngleG	float[pixels]	degrees	Solar zenith angle at TOA (Point G)
LineOfSightZenithAngleE	float[pixels]	degrees	Line-of-sight zenith angle at TOA (Point E)
LineOfSightZenithAngleCentre	float[pixels]	degrees	Line-of-sight zenith angle at TOA (Point F)
LineOfSightZenithAngleG	float[pixels]	degrees	Line-of-sight zenith angle at TOA (Point G)
RelativeAzimuthE	float[pixels]	degrees	Relative azimuth at TOA (Point E)
RelativeAzimuthCentre	float[pixels]	degrees	Relative azimuth at TOA (Point F)
RelativeAzimuthG	float[pixels]	degrees	Relative azimuth at TOA (Point G)
SolarZenithAngleSatE	float[pixels]	degrees	Solar zenith angle at satellite (Point E)
SolarZenithAngleSatCentre	float[pixels]	degrees	Solar zenith angle at satellite (Point F)
SolarZenithAngleSatG	float[pixels]	degrees	Solar zenith angle at satellite (Point G)
LineOfSightZenithAngleSatE	float[pixels]	degrees	Line-of-sight zenith angle at satellite (Point E)
LineOfSightZenithAngleSatCentre	float[pixels]	degrees	Line-of-sight zenith angle at satellite (Point F)
LineOfSightZenithAngleSatG	float[pixels]	degrees	Line-of-sight zenith angle at satellite (Point G)
RelativeAzimuthSatE	float[pixels]	degrees	Relative azimuth at satellite (Point E)
RelativeAzimuthSatCentre	float[pixels]	degrees	Relative azimuth at satellite (Point F)
RelativeAzimuthSatG	float[pixels]	degrees	Relative azimuth at satellite (Point G)
SubSatellitePointLongitude	float[pixels]	degrees	Geodetic longitude of subsatellite point
SubSatellitePointLatitude	float[pixels]	degrees	Geodetic latitude of subsatellite point
SatelliteAltitude	float[pixels]	km	Geodetic altitude of satellite
EarthRadius	float[pixels]	km	Radius of the Earth



<i>Dataset Name</i>	<i>Data Type</i>	<i>Unit</i>	<i>Description</i>
IndexInScan	integer[pixels]	-	Index of the pixel within the scan (0-2 forward scan, 3 backward scan)
SubPixelInScan	integer[pixels]	-	Subpixel within the scan (0-3 for GOME/ERS-2; 0 to 3, 7 or 31 for GOME-2/MetOp)
ViewMode	integer[pixels]	-	Scanning mode of the instrument at the time of acquisition (bits 0-7), geolocation flags (bit 8-31) Allowed values: - Nominal (0), Narrow (1), Static (2), SouthPolar (3), NorthPolar (4) - DescendingFlag (bit 8): set if the pixel is located in the descending part of the orbit

6.4 TOTAL_COLUMNS Group

The data sets in the *TOTAL_COLUMNS* group are given in the following tables. Attributes attached to all data sets in this group are the same as those for the *GEOLOCATION* group.

This group contains the key trace gas total column information. Data sets are arrays of size N, where N is the number of ground pixels in the product granule.

All entries starting with the name of the trace gas are only included if the trace gas total column has been retrieved, in which case it is included in the */META_DATA/MainSpecies* attribute.

<i>Dataset Name</i>	<i>Data Type</i>	<i>Unit</i>	<i>Description</i>
O3	float[pixels]	Dobson Units	Total vertical column density of O3
O3_Error	float[pixels]	%	Error on total vertical column density of O3
O3Tropo (*)	float[pixels]	Dobson Units	Tropospheric vertical column density of O3
O3Tropo_Error (*)	float[pixels]	%	Error on tropospheric vertical column density of O3
NO2	float[pixels]	molecules/cm ²	Total vertical column density of NO2
NO2_Error	float[pixels]	%	Error on corrected total vertical column density of NO2
NO2Tropo	float[pixels]	molecules/cm ²	Tropospheric vertical column density of NO2
NO2Tropo_Error	float[pixels]	%	Error on tropospheric vertical column density of NO2
BrO	float[pixels]	molecules/cm ²	Vertical column density of BrO
BrO_Error	float[pixels]	%	Error on vertical column density of BrO
BrOTropo (*)	float[pixels]	molecules/cm ²	Tropospheric vertical column density of BrO
BrOTropo_Error (*)	float[pixels]	%	Error on tropospheric vertical column density of BrO
SO2	float[pixels]	Dobson Units	Vertical column density of SO2
SO2_Error	float[pixels]	%	Error on vertical column density of SO2
H2O	float[pixels]	kg/m ²	Vertical column density of H2O
H2O_Error	float[pixels]	%	Error on vertical column density of H2O
HCHO	float[pixels]	molecules/cm ²	Vertical column density of HCHO
HCHO_Error	float[pixels]	%	Error on vertical column density of HCHO
OCIO	float[pixels]	molecules/cm ²	Slant column density of OCIO
OCIO_Error	float[pixels]	%	Error on slant column density of OCIO
CHOCHO (*)	float[pixels]	molecules/cm ²	Slant column density of CHOCHO
CHOCHO_Error (*)	float[pixels]	%	Error on slant column density of CHOCHO

(*) for future use, not yet implemented



6.5 CLOUD_PROPERTIES Group

In this group, the main cloud properties of each pixel are stored.

<i>Dataset Name</i>	<i>Data Type</i>	<i>Unit</i>	<i>Description</i>
CloudFraction	float[pixels]	-	Cloud fraction
CloudFraction_Error	float[pixels]	%	Error on cloud fraction
CloudTopAlbedo	float[pixels]	-	Cloud-top albedo (-1 if clear sky)
CloudTopAlbedo_Error	float[pixels]	%	Error on cloud-top albedo (-1 if clear sky)
CloudTopHeight	float[pixels]	km	Cloud-top height (-1 if clear sky)
CloudTopHeight_Error	float[pixels]	%	Error on cloud-top height (-1 if clear sky)
CloudOpticalThickness	float[pixels]	-	Cloud optical thickness (-1 if clear sky)
CloudOpticalThickness_Error	float[pixels]	%	Error on cloud optical thickness (-1 if clear sky)
CloudTopPressure	float[pixels]	hPa	Cloud-top pressure (-1 if clear sky)
CloudTopPressure_Error	float[pixels]	%	Error on cloud-top pressure (-1 if clear sky)
CloudType	integer[pixels]	-	ISCCP cloud type classification (-1 if clear sky): 1 = cirrus, 2 = cirrostratus, 3 = deep convection, 4 = altocumulus, 5 = altostratus, 6 = nimbostratus, 7 = cumulus, 8 = stratocumulus, 9 = stratus
CloudMode	integer[pixels]	-	Mode in which cloud parameters have been calculated 0=normal mode, 1=snow/ice mode
SurfaceAlbedo	float[pixels]	-	Surface albedo used for cloud retrieval
PMDCloudFraction	float[PMDpixels]	-	Cloud fraction for forward-scan PMD subpixels

6.6 DETAILED_RESULTS Group

The following table lists ancillary surface/aerosol data and detailed processing results, as stored in the *DETAILED_RESULTS* group. Data sets (see Figure 4 on page 25) are represented either as arrays of size N, where N is the number of ground pixels in the product, or as matrices of dimensions NxM, for N the number of ground pixels (denoted as “pixels” in the following tables) and M the number of fitting windows (denoted as “windows” in the following tables).

<i>Dataset Name</i>	<i>Data Type</i>	<i>Unit</i>	<i>Description</i>
AAI	float[pixels]	-	Absorbing aerosol indicator
SurfaceHeight	float[pixels]	km	Surface altitude
SurfacePressure	float[pixels]	hPa	Pressure at the surface level
SurfaceConditionFlags	integer[pixels]	-	Flag for different pixel retrieval conditions, e.g. land/sea, sun glint or snow/ice (see 6.8.1)
SurfaceAlbedo	float[pixels][windows]	-	Surface albedo for the associated retrieval window
Quality_Flag	integer[pixels][windows]	-	Quality flags for each pixel/window (see 6.8.2)
VCD	float[pixels][windows]	mol/cm ²	Vertical column density of main parameter value
VCD_Error	float[pixels][windows]	%	Error on vertical column density
IntensityWeightedCloudFraction	float[pixels][windows]	-	Weighting factor between clear-sky and cloudy AMFs
ESC	float[pixels][windows]	mol/cm ²	Retrieved effective slant column
ESC_Error	float[pixels][windows]	%	Error on effective slant column
FittingRMS	float[pixels][windows]	-	RMS of the fit
FittingChiSquare	float[pixels][windows]	-	Square of Chi
FittingGoodness	float[pixels][windows]	-	Goodness of fit for the fitting window
FittingNumberOfIterations	integer[pixels][windows]	-	Number of iterations of non-linear fitting
GhostColumn	float[pixels][windows]	mol/cm ²	Ghost column used in VCD
AMFToGround	float[pixels][windows]	-	AMF to ground for species
AMFToGround_Error	float[pixels][windows]	%	Error on AMF to ground
AMFToCloudTop	float[pixels][windows]	-	AMF to cloud-top for species (-1 if clear sky)
AMFToCloudTop_Error	float[pixels][windows]	%	Error on AMF to cloud-top (-1 if clear sky)
AMFTotal	float[pixels][windows]	-	Total AMF
AMFTotal_Error	float[pixels][windows]	%	Total AMF error

The following subsections contain sub groups of the *DETAILED_RESULTS* group which contain trace gas specific data.



6.6.1 DETAILED_RESULTS/O3 Subgroup

In the following table, the number of atmospheric layers is denoted as “layers” in profile datasets.

<i>Dataset Name</i>	<i>Data Type</i>	<i>Unit</i>	<i>Description</i>
ESCRingCorrected	float[pixels]	mol/cm ²	Retrieved effective slant column (ring-corrected for ozone)
O3Temperature	float[pixels]	K	Fitted ozone temperature
RingCorrection	float[pixels]	-	Applied ring correction factor
O3Profile	float[pixels][layers]	DU	A priori O ₃ profile used in the retrieval of O ₃ (layers=13, optional parameter)
TemperatureProfile	float[pixels][layers]	K	A priori temperature profile used in the retrieval of O ₃ (layers=13, optional parameter)
IterativeVCDNumberOfIterations	integer[pixels]	-	Number of iterations for the iterative VCD algorithm

6.6.2 DETAILED_RESULTS/NO2 Subgroup

<i>Dataset Name</i>	<i>Data Type</i>	<i>Unit</i>	<i>Description</i>
AMFTropoToGround	float[pixels]	-	Tropospheric AMF for cloud-free part
AMFTropoToGround_Error	float[pixels]	%	Error on Tropospheric AMF for cloud-free part
AMFTropoToCloudTop	float[pixels]	-	AMF for cloudy part (-1 if clear sky)
AMFTropoToCloudTop_Error	float[pixels]	%	Error on AMF for cloudy part (-1 if clear sky)
AMFTropo	float[pixels]	-	Tropospheric AMF
AMFTropo_Error	float[pixels]	%	Error on tropospheric AMF
VCDStrato	float[pixels]	mol/cm ²	Stratospheric vertical column density
VCDStrato_Error	float[pixels]	%	Error on stratospheric vertical column density
VCDTropo	float[pixels]	mol/cm ²	Tropospheric vertical column density
VCDTropo_Error	float[pixels]	%	Error on tropospheric vertical column density
VCDCorrected	float[pixels]	mol/cm ²	Total vertical column density corrected for tropospheric contribution
VCDCorrected_Error	float[pixels]	%	Error on corrected total vertical column density
NO2Tropo_Flag	integer[pixels]	-	Flag indexing tropospheric NO ₂ calculations (see 6.8.3 on page 38)
AveragingKernel	float[pixels] [layers]	-	Total Cloudy Average Kernel (layers=24)
AveragingKernelPressure	float[pixels] [layers]	-	Total Cloudy Average Kernel Pressure (layers=24)

Please note that this section is empty for GOME/ERS-2 products.

For more information on the NO₂ parameters see section 8.

6.6.3 DETAILED_RESULTS/SO₂ Subgroup

The SO₂ algorithm internally calculates results for several assumed plume heights. The number of plume heights is available in the field “NumberOfPlumeHeights”, which also describes the cardinality of the subsequent datasets (denoted as “heights”). The different height values are available in the dataset “PlumeHeights”.

<i>Attribute Name</i>	<i>Data Type</i>	<i>Unit</i>	<i>Description</i>
NumberOfPlumeHeights	integer	-	Number of assumed plume heights
<i>Dataset Name</i>	<i>Data Type</i>	<i>Unit</i>	<i>Description</i>
PlumeHeights	float[heights]	km	Assumed plume heights for retrieval
ESCCorrected	float[pixels][heights]	mol/cm ²	Slant column density (background corrected)
AMFToGround	float[pixels][heights]	-	AMF to ground
AMFToGround_Error (*)	float[pixels][heights]	%	Error on AMF to ground
AMFToCloudTop	float[pixels][heights]	-	AMF to cloud-top (-1 if clear sky)
AMFToCloudTop_Error (*)	float[pixels][heights]	%	Error on AMF to cloud-top (-1 if clear sky)
AMFTotal	float[pixels][heights]	-	Total AMF
AMFTotal_Error (*)	float[pixels][heights]	%	Total AMF error
VCDCorrected	float[pixels][heights]	mol/cm ²	Total vertical column density (background corrected)
VCDCorrected_Error	float[pixels][heights]	%	Error on total vertical column density
SO ₂ _Flag	integer[pixels]	-	Flag indexing SO ₂ calculations (see 6.8.4 on page 38)

(*) for future use, not yet implemented

6.6.4 DETAILED_RESULTS/H₂O Subgroup

<i>Dataset Name</i>	<i>Data Type</i>	<i>Unit</i>	<i>Description</i>
ESC_O ₂	float[pixels]	mol/cm ²	effective O ₂ slant column
ESC_O ₄	float[pixels]	mol/cm ²	effective O ₄ slant column
RingCorrectionFactor	float[pixels]	-	RingCorrectionFactor
H ₂ O_Flag	integer[pixels]	-	Flag indexing H ₂ O calculations (see 6.8.5 on page 38)

6.6.5 DETAILED_RESULTS/HCHO Subgroup

<i>Dataset Name</i>	<i>Data Type</i>	<i>Unit</i>	<i>Description</i>
ESCCorrected	float[pixels]	mol/cm ²	Slant column density (background corrected)
ESCRefSector	float[pixels]	mol/cm ²	Slant column density for the Pacific Region (160-240°)
ESCRefSectorEquator	float[pixels]	mol/cm ²	Slant column density for the Pacific Equator Region
VCD0	float[pixels]	mol/cm ²	A priori vertical column density for the Pacific Region (160-240°) from IMAGES model
VCDCorrected	float[pixels]	mol/cm ²	Total vertical column density (background corrected)
HCHO_Flag	integer[pixels]	-	Flag indexing HCHO calculations (see 6.8.6 on page 39)

6.6.6 DETAILED_RESULTS/CHOCHO Subgroup

For future use, not yet implemented



6.7 DETAILED_RESULTS_GODFIT Group

As the GDP-5 algorithm is different to GDP-4, an additional output section was introduced for each trace gas processed with GDP-5. For O₃ (DETAILED_RESULTS_GODFIT/O3), it contains the following datasets (layers=13):

Dataset Name	Data Type	Unit	Description
O3Profile	float[pixels][layers]	DU	A priori O ₃ profile used in the retrieval of O ₃
TemperatureProfile	float[pixels][layers]	K	A priori temperature profile used in the retrieval of O ₃
FitPar1_O3	float[pixels]	DU	O3 column
FitPar2_TemperatureShift	float[pixels]	K	Temperature shift
FitPar3_Albedo1	float[pixels]	-	Internal closure parameter 1
FitPar4_Albedo2	float[pixels]	-	Internal closure parameter 2
FitPar5_Albedo3	float[pixels]	-	Internal closure parameter 3
FitPar6_Ring	float[pixels]	-	Fitted ring spectrum
FitPar7_Undersampling	float[pixels]	-	Fitted undersampling
FitPar8_WavelengthShift	float[pixels]	nm	Fitted earthshine spectrum shift
NumberOfIterations	float[pixels]	-	Number of fitting iterations
FittingRMS	float[pixels]	-	Final RMS of the fit
O3Temperature	float[pixels]	K	Fitted ozone temperature, including T-Shift
GhostColumn	float[pixels]	DU	Associated ghost column
CovarianceMatrix	float[pixels][8][8]	-	Covariance and Correlation results matrix (see below)
AveragingKernels	float[pixels][layers]	-	Averaging kernels for each atmosphere layer

For the fitting parameters, the general name scheme is “FitParN_<name>”, where “N” is the number of the fitting parameter, and “<name>” the corresponding name. With this approach, the desired dataset can be retrieved from the product even if the position in the fitting vector should change in the future.

The Covariance dataset contains a square matrix with the dimensions of the fitting vector. In the lower/left triangle, the covariance is available, the diagonal contains the variance, and the upper/right triangle contains the correlation:

$$\text{cor}_{ij} = \text{cov}_{ij} / \sqrt{(\text{cov}_{ii} * \text{cov}_{jj})} \text{ for } j > i \text{ (upper/right triangle)}$$

6.8 Detailed Flag Description

6.8.1 SurfaceConditionFlags

Flag	Value	Description
0	1	Land/Sea Set when at least 60% of the ground pixel's area is classified as "sea"
1	2	Sun glint Set when at least one of the PMD subpixels is affected by sunglint
2	4	Snow/Ice

These flags give additional information about the surface state during the retrieval.

6.8.2 QualityFlags

Flag	Value	Description	Specified Valid Conditions							
			O ₃	NO ₂	BrO	SO ₂	H ₂ O	HCHO	OCIO	
0	1	Invalid total column If the retrieved total column is invalid, it is replaced with the fill value and this flag is set, together with flags 1 and 2	retrieval possible and result >= 0	retrieval possible	retrieval possible	retrieval possible	retrieval possible	retrieval possible	retrieval possible	retrieval possible
1	2	Total column out of range Set if the total column retrieved for this ground pixel is outside the specified range	75-700 DU	0-5*10 ¹⁶ mol/cm ²	0-1.5*10 ¹⁴ mol/cm ²	-10-1000 DU	0-100 kg/m ²	< 1.0*10 ¹⁷ mol/cm ²	-0.3 - 100*10 ¹⁵ mol/cm ²	
2	4	Large error in ESC Set if the <i>ESC_Error</i> value of this ground pixel exceeds the specified threshold	<=2%	<=50%	<=100%	Not applicable	<= 50%	Not applicable	Not applicable	Not applicable

These flags give additional information about the quality of the total column retrieval. If for example the fitting of the slant column does not succeed (or in case of ozone the fitting results produce negative values), flag 0 (and also flag 1 and 2) is set to indicate this condition, and the total column field will contain the fill value.

If the total column has been retrieved, but is out of the specified range, flag 1 is set. If the associated slant column error exceeds a specific threshold, flag 2 is set.

See *VCDQualityIndicator* in 6.2 on page 26 for the percentage of pixels which have been flagged as an overall quality indicator for the whole orbit.



6.8.3 NO₂Tropo_Flags

Flag	Value	Description
0	1	Polluted condition: <i>VCDTropo</i> and <i>VCDCorrected</i> values are available. <ul style="list-style-type: none"> • <i>VCD</i> contains the total column density based on an unpolluted AMF. • <i>VCDCorrected</i> contains the pollution corrected total column density. • <i>VCDTropo</i> contains the tropospheric column density. Note: <i>IntensityWeightedCloudFraction</i> < 50%
1	2	Unpolluted condition: <i>VCDTropo</i> and <i>VCDCorrected</i> not available (fill-values). <ul style="list-style-type: none"> • <i>VCD</i> contains the total column density based on an unpolluted AMF. Note: <i>IntensityWeightedCloudFraction</i> < 50%.
2	4	Cloudy condition: <i>VCDTropo</i> and <i>VCDCorrected</i> not available (fill-values). <ul style="list-style-type: none"> • <i>VCD</i> contains the total column density based on an unpolluted AMF. Note: <i>IntensityWeightedCloudFraction</i> > 50%
3	8	Measurement in polar regions (Lat > 70 deg): <i>VCDTropo</i> and <i>VCDCorrected</i> not available (fill-values). <ul style="list-style-type: none"> • <i>VCD</i> contains the total column density based on an unpolluted AMF
4	16	NO₂ column data not available: <ul style="list-style-type: none"> • <i>VCD</i>, <i>VCDTropo</i> and <i>VCDCorrected</i> contain fill-values

For more information on the NO₂ parameters see Section 8.

6.8.4 SO₂_Flags

Flag	Value	Description
0	1	Measurement in polar regions (SZA > 75 deg): <ul style="list-style-type: none"> • reduced quality of SO₂ total column
1	2	SO₂ column data not available: <ul style="list-style-type: none"> • <i>VCD</i> and <i>VCDCorrected</i> contain fill-values
2	4	SO₂ column data not available due to database. <ul style="list-style-type: none"> • <i>VCD</i> and <i>VCDCorrected</i> contain fill-values

6.8.5 H₂O_Flags

Flag	Value	Description
0	1	Measurement in cloudy conditions <ul style="list-style-type: none"> • reduced quality of H₂O total column
1	2	Measurement in cloudy and/or elevation conditions (small O ₂): <ul style="list-style-type: none"> • reduced quality of H₂O total column

6.8.6 HCHO_Flags

<i>Flag</i>	<i>Value</i>	<i>Description</i>
0	1	Measurement with high solar zenith angle (SZA > 70 deg): <ul style="list-style-type: none"> reduced quality of HCHO total column
1	2	Cloudy conditions: <ul style="list-style-type: none"> reduced quality of HCHO total column Note: CloudFraction > 40%
2	4	HCHO column data not available: <ul style="list-style-type: none"> HCHO contains fill-values
3	8	HCHO column data not available due to database issues. <ul style="list-style-type: none"> HCHO contain fill-values



7 BUFR Product Format Description

7.1 Structure

The data in the BUFR file is organized in six sections: *INDICATOR SECTION*, *IDENTIFICATION*, *OPTIONAL SECTION*, *DATA DESCRIPTION*, *DATA SECTION* and *END SECTION*. The values in all sections are either copied from the level 1 ([R11], [R12]) or other input data, or calculated by the level 1-to-2 processor. Each of the sections of a BUFR message is made up of a series of octets. The term octet, meaning 8 bits, was coined to avoid having to continually qualify byte as an 8-bit byte.

The *DATA DESCRIPTION* section contains a list of descriptors defining the structure and the format of data following in *DATA SECTION*. This is called “self-descriptive” nature of BUFR. The strength of this self-descriptive feature is in accommodating change. For example, if new observations or observational platforms are developed, there is no need to invent a new code form to represent and transmit the new data; all that is necessary is the publication of additional data description tables. Similarly for the deletion of possibly outdated observations: instead of having to send “missing” indicators for a long period while awaiting a change to a fixed format code, the “missing” data are simply not sent in the message and the data description section is adjusted accordingly. The data description tables are not changed, however, so that archives of old data may be retrieved.

The data encoded in BUFR format is purely binary or bit oriented, thus making it both machine dependent and, at the same time, machine independent. The dependency comes in the construction or interpretation of BUFR messages: there is not much for a human to look at as all the numbers in a message, whether data descriptors or the data themselves, are binary integers. And that, of course, leads to the machine independence: with BUFR consisting entirely of binary integers any brand of machine can handle BUFR as well as any other.

Theoretically there is no upper limit to the size of a BUFR message but, by convention, BUFR messages are restricted to 15000 octets or 120000 bits. This limit is to allow an entire BUFR message to be contained within memory of most computers for decoding. It is also a limit set by the capabilities of the Global Telecommunications System (GTS) of the WMO. In UPAS the length of a single BUFR message is limited to 200 ground pixels, that gives approximately 10Kbytes for storing one message. The file contains the information corresponding to a single orbit can contain unlimited number of consecutive BUFR messages.

7.2 WMO/GTS Bulletin Identifier

The BUFR products from the O3M-SAF can be accessed using the following identifier:

Region	RTH	Country	TTAAii	CCCC	CodeForm
6	OFFENBACH	GERMANY	IUCX01	EDLR	FM 94-XIII

7.3 Section 0 - Indicator Section

<i>Octet</i>	<i>Description</i>	<i>Allowed Values</i>
1-4	“BUFR” (coded according to the CCITT International Alphabet No. 5)	“BUFR“
5-7	Total length of BUFR message, in octets (including Section 0)	0-15000
8	BUFR edition number (currently 4)	1-4

7.4 Section 1 - Identification Section

<i>Octet</i>	<i>Description</i>	<i>Allowed/Used Values</i>
1-3	Length of section, in octets	int value
4	BUFR master table (zero if standard WMO FM 94 BUFR tables are used - provides for BUFR to be used to represent data from other disciplines, and with their own versions of master tables and local tables)	0
5-6	Originating centre: code table 0 01 031	210
7-8	Originating sub-centre	0
9	Update sequence number (zero for original BUFR messages; incremented for updates)	1
10	Bit 1 = 0 No optional section = 1 Optional section included Bits 2 - 8 set to zero (reserved)	0
11	Data Category type (BUFR Table A)	3
12	Data Category sub-type (defined by local ADP centres)	255
13	Local data sub-category	206
14	Version number of master tables used (currently 2 for WMO FM 94 BUFR tables)	11
15	Version number of local tables used to augment the master table in use	0
16-17	Year	2xxx
18	Month	1-12
19	Day	1-31
20	Hour	0-23
21	Minute	0-59
22	Second	0-59

7.5 Section 3 - Indicator Section

<i>Octet</i>	<i>Description</i>	<i>Allowed/Used Values</i>
1-3	Length of section, in octets	
4	Set to zero (reserved)	
5-6	Number of data subsets	200
7	Bit 1 = 1 observed data = 0 other data Bit 2 = 1 compressed data = 0 non-compressed data Bit 3 - 8 set to zero (reserved)	192
8-	A collection of descriptors which define the form and content of individual data elements comprising one data subset in the data section.	

7.6 Section 3 - UPAS Level-2 Specific List of Descriptors

<i>Descriptor</i>	<i>Description</i>	<i>Value</i>
0 01 007	Satellite Identifier	5 = Metop-2
0 02 019	Satellite Instruments	220 = GOME-2
3 01 011	Date in format YYYY-MM-DD (0 04 001, 0 04 002, 0 04 003)	
3 01 013	Time in format HH-MM-SS (0 04 004, 0 04 005, 0 04 006)	
3 01 021	Latitude / Longitude Centre (0 05 001, 0 06 001)	
1 02 004	Repeat next 2 fields 4 times (for four corners of a pixel)	
0 27 001	Latitude (High Accuracy)	
0 28 001	Longitude (High Accuracy)	
0 10 001	Height of land surface	
0 14 019	Surface Albedo	0.0-1.0
0 07 025	Solar zenith angle	
0 10 080	Viewing Zenith Angle	
0 05 023	Sun to satellite azimuth difference	
0 20 010	Cloud Cover (Total)	[%]
0 08 003	Vertical significance	2 = Cloud top
0 07 004	Pressure	[pa]
0 14 026	Albedo at the top of clouds	0.0-1.0
0 20 014	Height of top of clouds	[km]
0 13 093	Cloud optical thickness	
0 31 001	Delayed descriptor replication factor	2
0 07 004	Pressure	Top
0 07 004	Pressure	Bottom
0 08 043	Atmospheric chemical or physical constituent type	see table below
0 08 044	CAS registry number	see table below
0 15 021	Integrated mass density	[kg/m ²]
2 24 000	First order statistics follow	
2 36 000	Backward reference bitmap	
0 31 001	Delayed descriptor replication factor	2
0 31 031	Data present indicator	0/1
0 01 031	Identification of originating/generating centre	254 (Eumetsat)
0 01 032	Generating Application Defined by local Generating Centre	1
0 08 023	First order statistics	7 = Mean absolute error
0 31 001	Delayed descriptor replication factor	2
0 15 021	Scaled Integrated mass density	[kg/m ²]



7.7 Section 4 - Indicator section.

<i>Octet</i>	<i>Description</i>	<i>Allowed Values</i>
1-3	Length of section, in octets	
4	Set to zero (reserved)	
5-	Binary data as defined by descriptors which begin at octet 8, Section 3	

7.8 Section 5 - End Section

<i>Octet</i>	<i>Description</i>	<i>Allowed Values</i>
1-4	“7777” (coded according to the CCITT International Alphabet No. 5)	„7777“

7.9 Trace Gas Table

The following field values are used for the different trace gases:

<i>Trace gas</i>	<i>Trace gas name</i>	<i>Atmospheric Chemical No. (08 043 descriptor)</i>	<i>CAS Registry Number (08 044 descriptor)</i>
O ₃	Ozone	0	10028-15-6
NO ₂	Nitrogen dioxide	5	10102-44-0
BrO	Bromine oxide	9	15656-19-6
SO ₂	Sulfur dioxide	8	7446-09-5
H ₂ O	Water Vapour	1	7732-18-5
HCHO	Formaldehyde	7	50-00-0
OClO	Chlorine dioxide	10	10049-04-4
CHOCHO	Glyoxal	TBD	107-22-2

8 Using the Products

This section contains practical information on using the GOME products.

As a general advise it is strongly recommended to use only the forward-scan pixels and discard the back-scan pixels. Back-scan pixels are not only redundant, but they are less accurate than the forward-scan pixels due to their larger footprint size. The *IndexInScan* attribute from the *GEOLOCATION* group in the HDF5 products has values of 0,1,2 for East/Nadir/West forward-scan pixels; back-scan pixels can be easily filtered-out checking that *IndexInScan*<3. Back-scan pixels are not included in the BUFR products.

The H₂O entry in the *TOTAL_COLUMNS* group of the HDF5 products is set to fill-value for measurements under cloudy conditions. The retrieval values are nevertheless available in the *DETAILED_RESULTS* group under the VCD entry. The BUFR products contain all H₂O retrievals, but it is recommended not to use measurements under cloudy conditions (*cloud_fraction* * *cloud_top_albedo* < 0.6).

The NO₂ entry in the *TOTAL_COLUMNS* group contains the same value as the VCD entry (for the NO₂ window) in *DETAILED_RESULTS*. These two entries contain the total NO₂ column density based on an unpolluted AMF. The VCDcorrected entry in *DETAILED_RESULTS/NO2* contains the pollution corrected total NO₂ column density (available only for measurements with an intensity weighted cloud fraction < 50% and for latitudes < 70 deg). Note that VCDcorrected >= VCD. The NO₂Tropo entry in the *TOTAL_COLUMNS* group contains the same value as the VCDTropo entry in *DETAILED_RESULTS/NO2*. These two entries contain the tropospheric NO₂ column density (available only for measurements with an intensity weighted cloud fraction < 50% and for latitudes < 70 deg). The VCDStrato entry in *DETAILED_RESULTS/NO2* contains the stratospheric NO₂ column density (as derived with a spatial filtering approach and available only for latitudes < 70 deg).

8.1 Confidence Flags and Ancillary Fields

The users should check the quality flags associated with each trace gas and cloud product. Detailed information is given in the corresponding tables.

8.2 Software and Tools for reading the products

The HDF5 products can be read using the standard HDF software and tools available at:

http://www.hdfgroup.org/products/hdf5_tools

the above Web page contains HDF5 libraries for a number of programming languages. The BEAT and VISAN tools for ingesting, processing, and analyzing atmospheric remote sensing data fully support the GOME HDF5 products:

<http://www.stcorp.nl/beat>

ECMWF provides software for decoding BUFR products, see:

<http://www.ecmwf.int/products/data/software/bufr.html>

A Appendixes

A.1 HDF5 Data Types

The following table shows the correspondence between Product data types and HDF5 data types

<i>Data type</i>	<i>HDF5 predefined data type</i>
char	H5T_STD_I8LE
integer	H5T_STD_I32LE
float	H5T_IEEE_F32LE
double	H5T_IEEE_F64LE
string	H5T_C_S1
UTC	H5T_COMPOUND { H5T_STD_I32LE Day, H5T_STD_I32LE MillisecondOfDay }, where Day denotes number of days since 1st of January, 1950
VIEW_MODES	H5T_COMPOUND { H5T_STD_I32LE NominalPixels, H5T_STD_I32LE StaticPixels, H5T_STD_I32LE NarrowPixels, H5T_STD_I32LE PolarSouthPixels, H5T_STD_I32LE PolarNorthPixels }
CCSDS_ASCII	The format for ASCII Time Code is YYYY-MM-DDThh:mm:ss.ddd, where: YYYY = Year in four-character subfield with values 0001-9999 MM = Month in two-character subfield with values 01-12 DD = Day of month in two-character subfield with values 01-28,-29, -30, or -31 "T" = Calendar-Time separator hh = Hour in two-character subfield with values 00-23 mm = Minute in two-character subfield with values 00-59 ss = Second in two-character subfield with values 00-59 ddd = Decimal fraction of second where each d has values 0-9
POS_VEC	H5T_COMPOUND { H5T_IEEE_F64LE X, H5T_IEEE_F64LE Y, H5T_IEEE_F64LE Z }



A.2 Traceability Matrix of HDF5 Metadata to EECF Parameters

The EECF metadata parameters [A2] which are applicable to the D-PAF products are stored in the HDF5 file as attributes in the *META_DATA* group. The tracing of EECF parameters to the attributes in the product file is indicated in the following table. Attributes can only take values which are allowed by EECF.

<i>EECF Short Name</i>	<i>Attribute Name</i>	<i>Notes</i>
SATELLITE_ID	SatelliteID	possible values: ERS; M01, M02... for METOP
SENSOR_ID	InstrumentID	GOME
ORBIT_NO	StartOrbitNumber	
ACQUISITION_FACILITY_ID	ReceivingCentre	ECF, FBK, FUC, GCA, PGS, RUS, SOC, SVL, UBI, WAL, WEC, WIV
PROCESSING_FACILITY_ID	ProcessingCentre +ArchiveFacility	D-PAF DLR OP (ERS), O3DLR (METOP)
PROCESSING_DATE_TIME	ProcessingTime	
TEMPORAL_COVERAGE_START	SensingStartTime	
TEMPORAL_COVERAGE_STOP	SensingEndTime	
SOFTWARE_VERSION	ProductAlgorithmVersion	
AUX_DATA	InitializationFileVersion	
PRODUCT_TYPE	ProcessingLevel	“02” or “03”
REVISION	Revision	
SOURCE_ITEM	BaseProducts	

A.3 Traceability Matrix of HDF5 Metadata to UMARF Parameters

The UMARF metadata parameters [A3] applicable to the O3M-SAF products are stored in the HDF5 file as attributes in the *META_DATA* group. The mapping of UMARF parameters to product file attributes is shown below; again, attributes can only take values allowed by UMARF.

<i>UMARF Short Name</i>	<i>Attribute Name</i>	<i>Notes</i>
AARF	ArchiveFacility	possible values: D-PAF DLR OP (ERS), O3DLR (METOP)
ABID	ProductContents	Spectral Band Ids
AIID	InstrumentID	GOME
APAS	Applicable (*)	Product Size
APNA	Applicable (*)	Product Name
APNM	ProductType	e.g. O3MOTO, O3MNTO
APPN	BaseProducts	Parent Product Name
ASTI	SatelliteID	possible values: ERS; M01, M02, M03 for METOP
AVBA	BaseProductAlgorithmVersion	
AVPA	ProductAlgorithmVersion	Concatenation of the HDF5 attributes <i>ProductAlgorithmVersion</i> , <i>InitializationFileVersion</i> , <i>InternalProcessorRevision</i> , and <i>Revision</i>
GDMD	Applicable (*)	Disposition Mode: T, O, or P
GGTP	Applicable (*)	GranuleType: "DP"
GNFV	ProductFormatVersion	
GORT	Applicable (*)	OrbitType: "LEO"
GPLV	ProcessingLevel	"02" or "03"
GPMD	ProcessingMode	N, B, R, V
LLAE	SubSatellitePointEndLat	-90.0000 to +89.9999
LLAS	SubSatellitePointStartLat	-90.0000 to +89.9999
LLOE	SubSatellitePointEndLon	-180.0000 to +179.9999
LLOS	SubSatellitePointStartLon	-180.0000 to +179.9999
LONS	StartOrbitNumber	
LSVL	OrbitAscendingNodeLongitude	-180.0000 to +179.9999
LSVT	OrbitAscendingNodeCrossingDateTime	CCSDS date
PPRC	ProcessingCentre	possible values: D-PAF DLR OP (ERS), O3DLR (METOP)
PPST	Processing End Date and Time	CCSDS date
QDLC	MissingDataCount	
QDLP	MissingDataPercentage	
QDRC	DegradedRecordCount	
QDRP	DegradedRecordPercentage	
QQAI	Applicable (*)	Associated Quality Information
QQOV	Applicable (*)	Overall quality flag: OK/NOK
RRCC	ReceivingCentre	ECF, FBK, FUC, GCA, PGS, RUS, SOC, SVL, UBI, WAL, WEC, WIV
SMOD	InstrumentMode	e.g. NARROW, NORMAL or STATIC
SNIT	Applicable (*)	CCSDS date
SSBT	SensingStartTime	CCSDS date
SSST	SensingEndTime	CCSDS date

(*) Parameter is not contained in the HDF5 product, but will be provided by DIMS.