

4. Instrument Operations

M. Gottwald¹, A. Moore², S. Noël³, E. Krieg¹, R. Mager⁴, H. Kröger⁵

¹ Remote Sensing Technology Institute, German Aerospace Center (DLR-IMF), Oberpfaffenhofen, 82234 Wessling, Germany

² Vega IT GmbH, c/o ESA/ESOC, Robert-Bosch-Str. 5, 64293 Darmstadt, Germany

³ Institute of Environmental Physics / Institute of Remote Sensing (IUP-IFE), University of Bremen, Otto-Hahn-Allee 1, 28359 Bremen, Germany

⁴ EADS Astrium GmbH, Claude Dornier Straße, 88090 Immenstaad, Germany

⁵ Bichlmairstraße 17, 83703 Gmund am Tegernsee, Germany

Abstract: SCIAMACHY operations have to be highly autonomous. All instrument activities are stored on-board and activated by time-tagged commands. They execute measurements in all required viewing geometries including the unique limb/nadir matching. Observations of the Sun in occultation over the northern hemisphere and the Moon in occultation over the southern hemisphere occur at regular intervals, ranging from each orbit to each month. They are complemented by sub-solar observations. The lunar measurements need particularly accurate preparation due to the orbital motions of the Moon and ENVISAT around Earth. Both Sun and Moon occultations have to take refraction into account for the period when both targets are viewed through the lower atmosphere. Timing of SCIAMACHY measurement operations is entirely Sun or Moon related. The specified mission scenarios combine nadir, limb and eclipse measurements between Sun or Moon related events along the orbit. The smallest functional sequences are states, controlled via various parameter tables. When combining individual states, timelines are generated. Sets of states and timelines are stored on-board. Each timeline is activated by a single macrocommand. Both states and timelines can be modified from ground. Since SCIAMACHY has been provided by national agencies, instrument operations is a shared enterprise between DLR/NIVR and ESA.

Keywords: Limb/nadir matching – Sun occultation – Moon occultation – Mission scenarios – States – Timelines – SOST

SCIAMACHY's measurement operations concept required combining the properties of the ENVISAT operational environment – both space and ground segment, the challenging scientific needs and the characteristics of the sensor. Finally, a concept of autonomously executing functional sequences, all stored on-board, was developed. This permitted fully exploiting the instrument's flexibility without using too many resources of the ENVISAT mission or violating the requirements of the atmospheric science user community (EADS Astrium 2003).

The characteristics of a polar orbiting platform with short telemetry coverage at the high latitude station Kiruna or via the Ka-band Artemis link demanded highly autonomous on-board operations. This comprises not only on-board anomaly detection and initiating corrective actions as part of the instrument control but also the ability to configure the instrument status and to execute measurements without direct manual intervention from ground. The goal is to store the pre-planned measurement schedule on-board and execute it as a time-tagged sequence of measurement activities.

Scientific requirements include viewing geometries for atmospheric measurements of nadir, limb, Sun occultation and Moon occultation (Fig. 4-1). In addition, external (e.g. dark current, Sun reference) and internal (calibration lamps) observations supplement the measurement schedule. One of SCIAMACHY's main objectives is to measure the same atmospheric volume both in nadir and limb within one orbit, i.e. achieving limb/nadir matching of the geolocation of limb states with associated nadir states. It allows collecting scientific information for the same volume of air from two different measurement modes. The combination of nadir and limb measurements is especially useful for deriving tropospheric information.

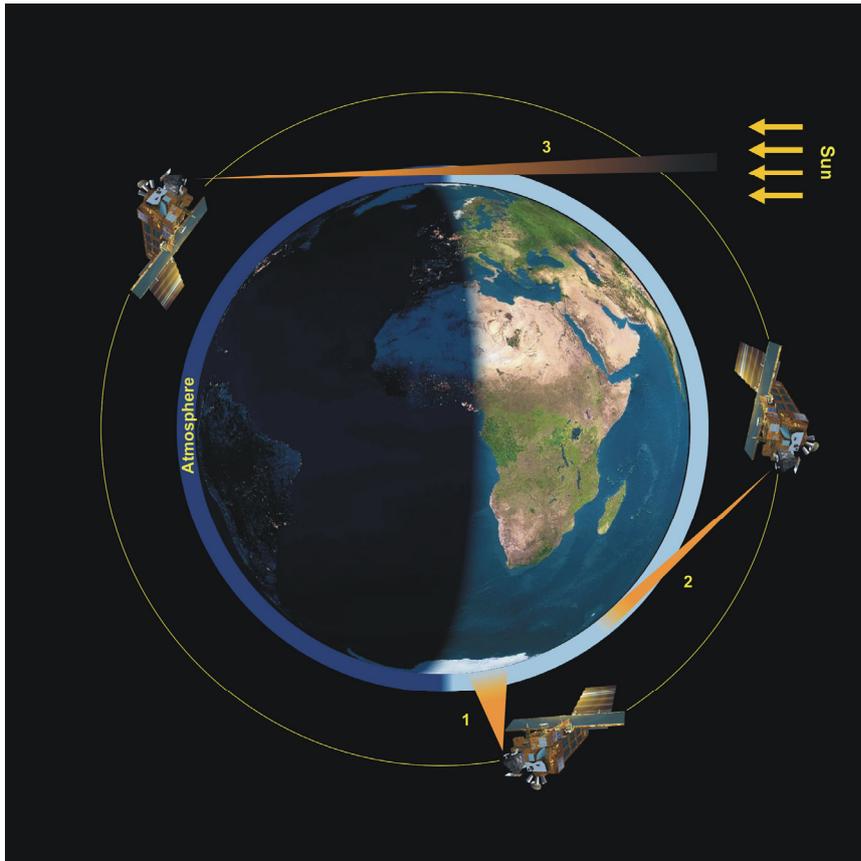


Fig. 4-1: SCIAMACHY's scientific observation modes: 1 = nadir, 2 = limb, 3 = occultation. (Courtesy: DLR-IMF)

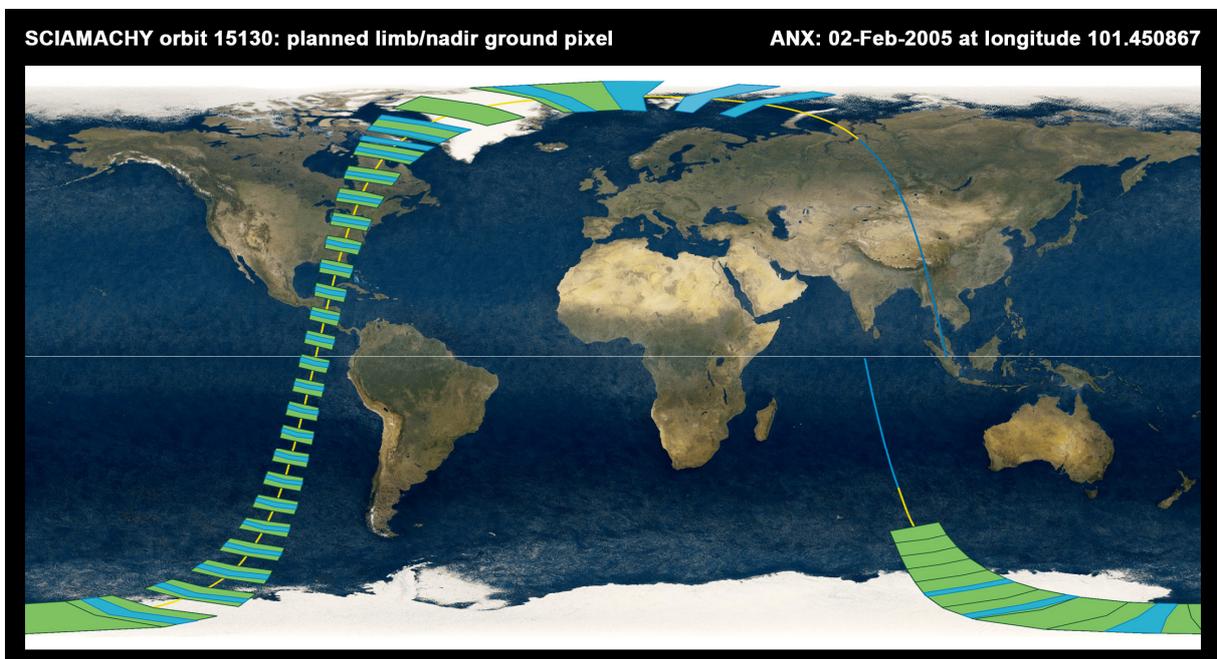


Fig. 4-2: An orbit with planned limb/nadir matching on the dayside of the orbit. The sequence of nadir and limb states in a timeline is arranged such that limb ground pixels (blue), defined by the line-of-sight tangent point, fall right into a nadir ground pixel (green) in the illuminated part of the orbit. (Courtesy: DLR-IMF/SRON)

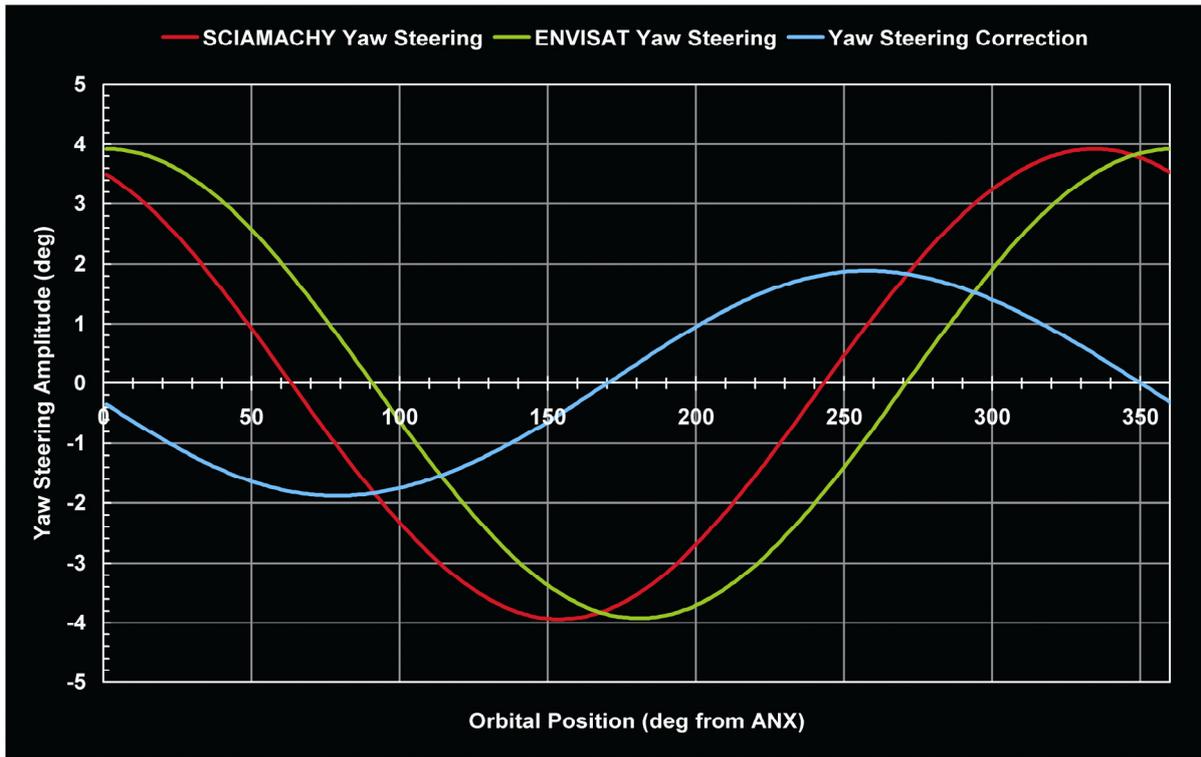


Fig. 4-3: ENVISAT’s yaw steering, the yaw steering correction of limb states and the resulting SCIAMACHY yaw steering. Between ENVISAT and SCIAMACHY yaw steering, an orbital shift of 27° exists which reflects the observation geometry in elevation when looking to the horizon in flight direction. (Courtesy: DLR-IMF)

When matching limb and nadir states, SCIAMACHY first observes an atmospheric volume at the horizon by looking slightly off the flight direction towards Earth’s rotation. Later in orbit, after a time interval $\Delta t = 430$ sec, the same volume of air crosses the subsatellite point and can be observed under nadir conditions (Fig. 4-2). The interval of $\Delta t = 430$ sec is defined by the altitude and angular velocity of the spacecraft platform. In limb mode, SCIAMACHY observes the horizon 3280 km ahead of the instrument close to flight direction. Because the spacecraft’s steering law is determined by the latitude-dependent Earth’s rotational velocity at the instantaneous subsatellite point, the line-of-sight does not intercept the horizon at a point where the Earth’s and spacecraft’s angular velocities would lead to limb/nadir matching. Therefore, an instrument yaw steering correction is implemented in SCIAMACHY’s on-board software to compensate for the phase shift between local yaw steering and instrument line-of-sight in limb observations. It reflects the angular difference of approx. 27° in latitude between local subsatellite point during limb measurement and line-of-sight interception at the Earth’s horizon (Fig. 4-3).

4.1 Sun and Moon Observation

All measurement activities are planned relative to solar and lunar constellations. SCIAMACHY operations are either Sun or Moon fixed, but never Earth fixed (SOST 1996). When viewed from ENVISAT, solar and lunar constellations are determined by the spacecraft propagating along the orbit, the orientation of the orbital plane, the lunar motion around Earth and the Earth orbiting the Sun. Thus the observing conditions can be completely predicted by careful orbit analysis. These predicted conditions are then translated into configurable instrument states and timelines.

Sun Occultation

The sun-synchronous orbit Mean Local Solar Time (MLST) of 10 a.m. during descending node crossing leaves the Sun always to the left of the flight direction, i.e. at azimuth angles $> 180^\circ$. The

elevation of the Sun varies between approx. -70° and $+70^\circ$. Sunrise occurs after ascending node crossing when ENVISAT moves towards the North Pole on the eclipse side of the orbit. The Sun becomes visible at the Earth's limb left of the flight direction at medium to high geographic latitudes (Fig. 4-4). The exact latitude is dependent on the actual position of the *true* Sun relative to the Earth (*true* Sun reflects the actual annual orbital motion of the Earth contrary to the *mean* Sun which is characterised by assuming a constant Earth orbital velocity). In summer, Sun occultation measurements start when the spacecraft has reached geographic latitudes of about 27° north while in winter, the subsatellite point moves up to about 75° north. At sunrise, the solar elevation is identical to the elevation of the Earth's limb, i.e. approx. 27.2° . The azimuth angle at sunrise has a mean value of 330° , corresponding to the MLST at descending node crossing of 10 a.m. and changes over a year due to the apparent motion of the true Sun. Caused by the orbital motion of ENVISAT, the Sun rises almost vertically through SCIAMACHY's limb TCFoV. In an occultation measurement, the ASM has to acquire the Sun at an angle of about 330° and to follow the slightly changing azimuth as the Sun moves higher. In the elevation direction the Sun must be tracked by the ESM up to the maximum elevation angle of 19.5° , limited by the TCFoV. From the Earth's limb up to an elevation angle of 25.2° , corresponding to an altitude of 100 km, the sunlight is transmitted through the Earth's atmosphere and partially absorbed. Thus, the Sun serves as a target for probing the atmospheric trace gas constituents (altitude < 100 km) and as a target for calibration and monitoring measurements (altitude > 100 km), as well. Therefore, the total time of the sunrise in the limb TCFoV is referred to as *Sun Occultation & Calibration (SO&C)* window.

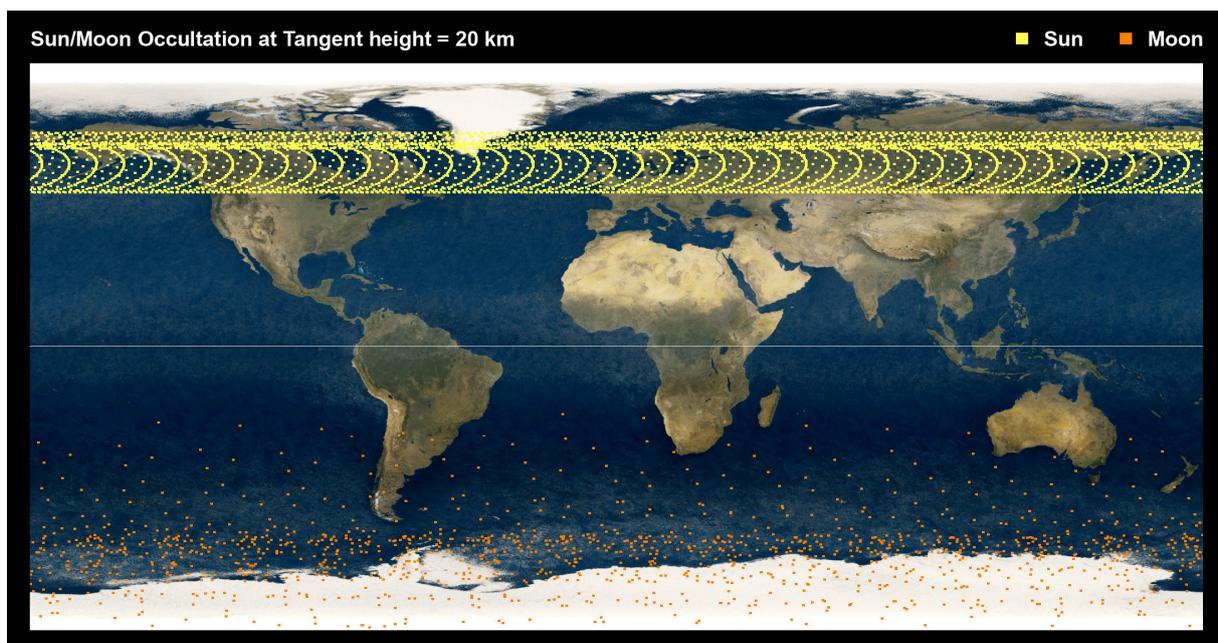


Fig. 4-4: Tangent point geolocation at an altitude of 20 km for all solar and lunar occultation measurements in the year 2009. (Courtesy: DLR-IMF/SRON)

Sub-solar Observations

The sub-solar port above the ESM provides additional access to the Sun above the atmosphere. Because Sun viewing in this configuration does not involve the ASM, these measurements, when used in conjunction with data from other light paths, permit monitoring the characteristics of the ASM mirror. The Sun is visible through the sub-solar port when the Sun has reached its highest elevation. This occurs at an azimuth angle of 270° . The sub-solar elevation angle changes continuously with season. Therefore, the Sun moves up and down over a year along the elongated dimension of the sub-solar TCFoV when passing through the window. The duration of a sub-solar measurement is defined by the time it takes the Sun to pass through the azimuth dimension of the sub-solar port, reduced by

the small aperture stop to only 0.72° . It amounts to 21 sec, with the Sun being fully visible for a short period of only 3.5 sec.

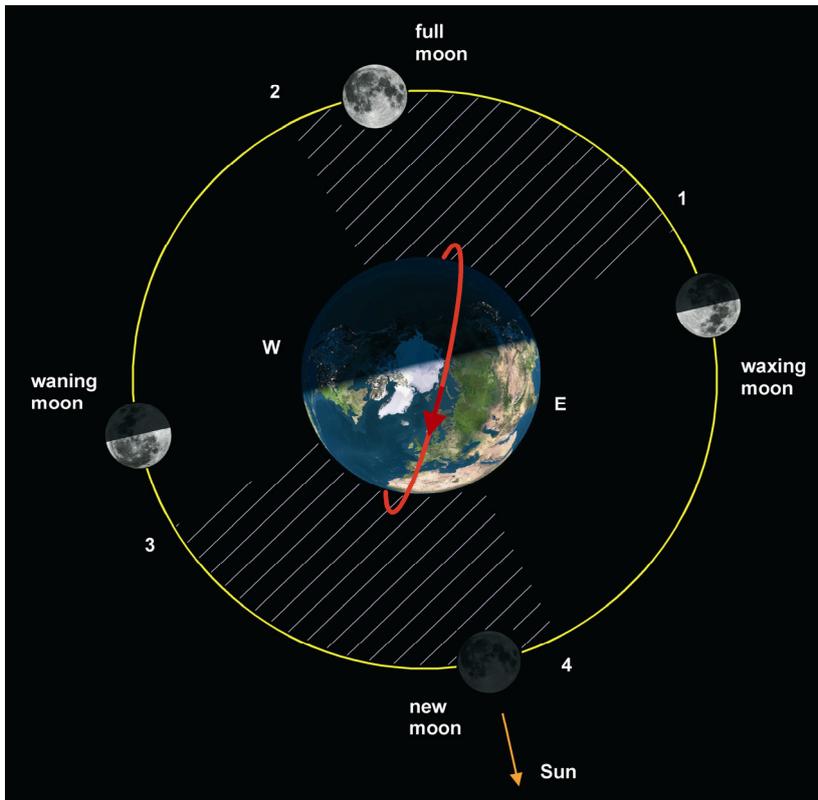


Fig. 4-5: SCIAMACHY's monthly lunar visibility occurs between 1 and 2 over the southern hemisphere (lunar phase > 0.5). The hatched area illustrates the limb TCFoV of 88° . Visibility at smaller lunar phases over the northern hemisphere between 3 and 4 is not used because it coincides with solar occultations. (Courtesy: DLR-IMF)

Moon Occultation

Individual observations of the Moon follow the same principles as described for the Sun. The lunar disk is acquired by the ASM and ESM and tracked as the moon rises through the limb TCFoV. As in the case of the Sun, the Moon also acts as a target for scientific measurements and for calibration and monitoring measurements. The corresponding time interval is the *Moon Occultation & Calibration (MO&C)* window. Predicting lunar occultation measurements requires analyses of the viewing conditions as a function of the monthly lunar motion. For a full orbit, the Moon moves in *direct motion* within a *synodic month* of 29.53 days. The Moon's orbital plane is inclined by 5.1° to the ecliptic. Thus, to a first order, the Moon's orbital plane lies perpendicular to ENVISAT's orbital plane. Whenever the lunar orbit crosses the limb TCFoV of SCIAMACHY, moonrise can be observed (Fig. 4-5). With a total azimuth size of $2 \times 44^\circ$ for the limb TCFoV, the monthly time interval when lunar measurements can be executed is

$$\Delta_{moon} = \frac{88^\circ}{360^\circ} \times 29.5 \text{ days} \approx 7.2 \text{ days}$$

The duration of each monthly observation opportunity displays a seasonal variation of between 5.5-8 days. Due to the lunar orbital motion, the first moonrise in a monthly period occurs on the left side of the limb TCFoV (azimuth = 316°). Each orbit moonrise progresses with an azimuth rate of about $1^\circ/\text{orbit}$ to the right side of the limb TCFoV. At the end of the monthly visibility, the Moon has reached the right edge of the TCFoV (azimuth = 44°). The lunar phase changes continuously within each monthly period. At the beginning of the visibility, the phase amounts to about 0.6-0.7. Full Moon

can be observed close to the end of the monthly cycle because the 10 a.m. descending node crossing time criterion of ENVISAT's sun-synchronous orbit only allows full illumination of the lunar disk when the Moon rises at an azimuth of about 30°. Moonrise occurs over a large range of geographic latitudes (see Fig. 4-4). Unlike sunrise where the geographic latitude of the subsatellite point – and thus also the geolocation of the tangent point where the atmosphere is probed – changes slowly over a year, the latitude of the subsatellite point at moonrise varies significantly within a monthly period. This fact is particularly interesting for the occultation measurements because it allows studying the atmosphere at various latitudes. Moonrise at lunar phases > 0.5 can only be observed over the southern hemisphere. This complements solar occultations which are restricted to the northern hemisphere.

Refraction

Observation of sunrise and moonrise from a spacecraft is affected by the refractive properties of the Earth's atmosphere. Because the Sun and Moon have almost the same apparent size of 31.5 arcmin, the effect of refraction is identical for both. The refraction angle depends on the Earth's radius, the scale height of the exponentially decreasing refractivity profile, the refractivity and the height of the tangent point of the incident rays. For visible light the refraction angle amounts to approx. 70 arcmin at the horizon ($h = 0$ km), i.e. SCIAMACHY can observe the first solar/lunar photons when the Sun/Moon is still well below the geometric horizon. As the Sun or Moon rises, the refracted image of the disk is distorted by differential refraction (Fig. 4-6). At an altitude of $h \approx 17$ km, refraction has become so small that refracted image and the celestial position of the solar or lunar disk overlap. Below this height, the angular rate of the rising Sun or Moon as defined by the moving spacecraft is larger than the variable rate of their refracted images. At low altitudes, measuring the Sun or the Moon can be difficult due to obscuration by or reflected radiation from clouds. On-board control of the scan mirrors during occultation uses the Sun Follower with its relatively wide field of view of $2.2^\circ \times 2.2^\circ$. Since the lunar disk can be outshined by an illuminated cloudy atmosphere, moon occultation measurements are only possible when the Moon rises on the night side beyond the terminator.

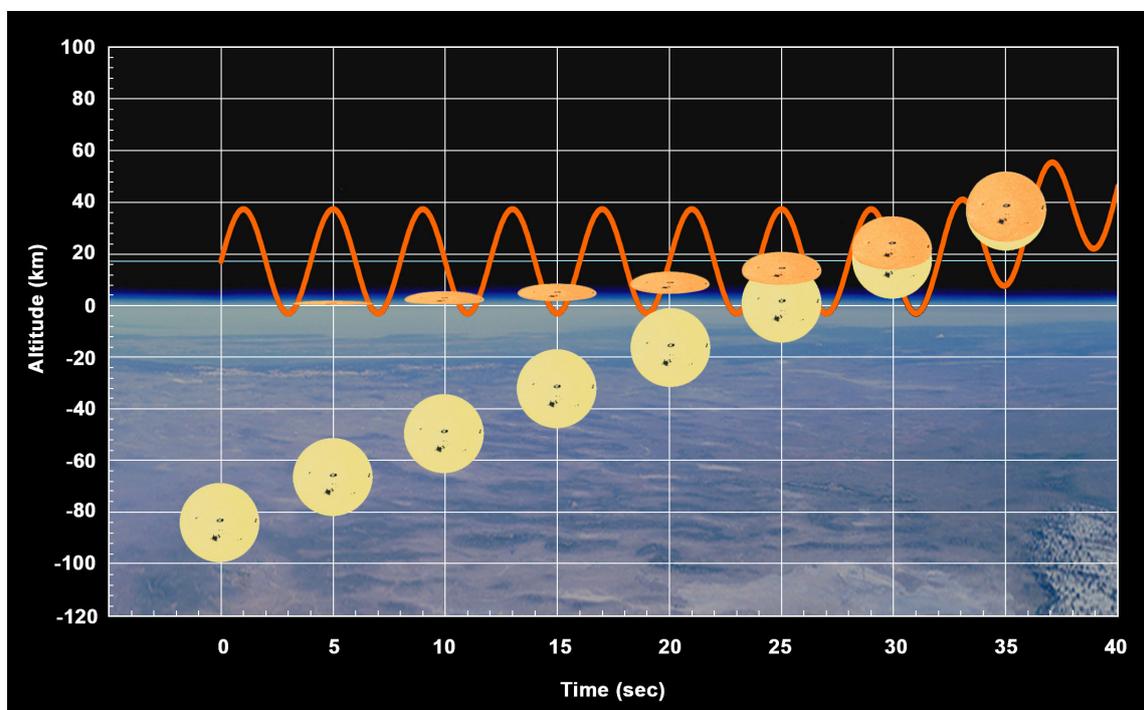


Fig. 4-6: The effect of refraction during sunrise. The position of the Sun is indicated by the yellow disk while the distorted refracted image appears above the horizon. About 30 sec after begin of sunrise the position of the true and refracted disk overlap and refraction becomes negligible. The sinusoidal curve illustrates the elevation scan of the ESM at the start of the Sun occultation states. (Courtesy: DLR-IMF; background photo: NASA Johnson Space Center and Image Science & Analysis Laboratory)

4.2 Reference Measurement Orbit

A typical SCIAMACHY orbit starts above the northern hemisphere with an observation of the rising Sun. In order to acquire light also from the sparsely illuminated atmosphere at the limb in the direction of the rising Sun, a sequence of limb measurements precedes each Sun occultation measurement. Once the Sun has risen, it is tracked by the ESM for the complete pass through the SO&C window. After about 175 sec the Sun leaves the limb TCFoV at the upper edge. In order to fully exploit the high spatial resolution during occultation, measurement data readout with a high rate is required in the SO&C window. Until the passage of the sub-solar point, a series of matching limb/nadir observations are executed. At the sub-solar point the Sun, generally close to descending node crossing, has reached its highest elevation relative to ENVISAT. A sub-solar measurement is only executed when a sub-solar calibration opportunity has been assigned by ENVISAT. Because the Ka-band antenna in its operational position vignettes the sub-solar TCFoV, only 3 orbits per day with sub-solar opportunities are possible. Again, a sequence of matching limb/nadir measurements follows. Above the southern hemisphere, the Moon becomes visible during the monthly lunar visibility period, otherwise matching limb/nadir observations continue. The rising Moon is observed similarly to the rising Sun from bottom to top of the limb TCFoV. A series of limb/nadir observations concludes the illuminated part of the SCIAMACHY orbit. Because the instrument is still viewing sunlight while the projected ground-track in the flight direction will already have seen sunset, the final measurements in this phase are only of the nadir type. When ENVISAT enters the eclipsed part of the orbit, dedicated eclipse observations can be executed until SCIAMACHY moves towards another sunrise and the orbit sequence starts again (Fig. 4-7). Ascending node crossing always occurs in eclipse phase. The reference orbit is entirely based on the *Sun/Moon fixed* concept. While *Sun fixed* events show a relatively stable temporal behaviour over a year, orbital segments related to Moon occultation measurements do not. They exhibit strong variability both within a monthly lunar observation period and over a year.

4.3 Mission Scenarios

It has proven useful to structure SCIAMACHY operations in the form of *mission scenarios* (SOST 2001a). These define objectives on various planning levels in a top-down approach. The mission scenarios finally lead to a scenario for a single orbit, i.e. an orbital mission scenario that is the basis for continuous mission planning and scheduling. For nominal operations, the orbital mission scenario is defined by:

- a swath width of ± 480 km relative to ground track in nadir and limb scans for global coverage within 6 days (taking the alternating limb/nadir measurements into account – see Fig. 4-8)
- matching limb/nadir measurements in the illuminated part of the orbit
- Sun occultation measurements each orbit
- Moon occultation measurements whenever possible (moonrise on nightside of Earth)
- mesosphere/lower thermosphere measurements in eclipse each orbit, intermittent with calibration and monitoring measurements
- the equivalent of 2 days per month with mesosphere/lower thermosphere measurements in the illuminated part of the orbit
- calibration and monitoring measurements on a daily (every 14th orbit), weekly (every 100th orbit) and monthly basis

The simplest orbital mission scenario is executed whenever the Moon is not visible and no regular calibration and monitoring tasks have to be performed. This scenario occurs about 90% of the time during a month and can be accommodated by 4 timelines. The most complex scenario is defined when implementing monthly calibration and monitoring requirements. This consists of a series of 5 consecutive orbits filled with calibration and monitoring activities.

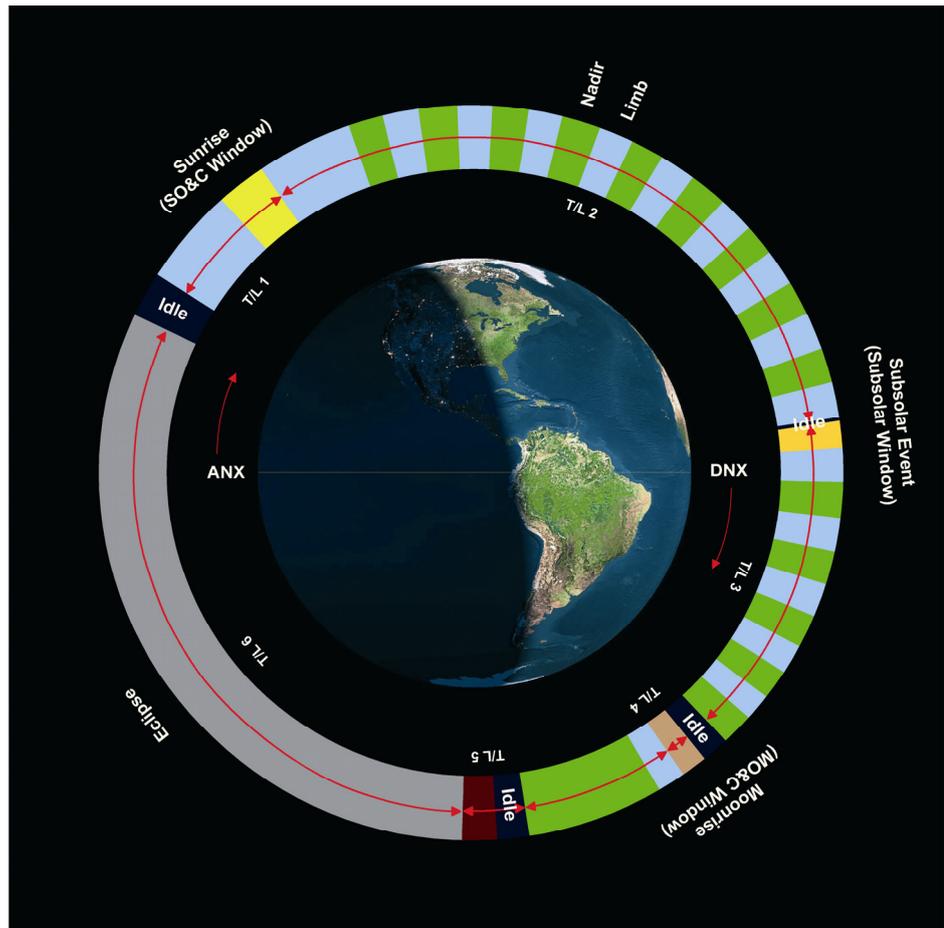


Fig. 4-7: SCIAMACHY reference orbit with Sun/Moon fixed events along the orbit. The events define orbital segments which are filled with timelines. State duration is not to scale. (Courtesy: DLR-IMF)

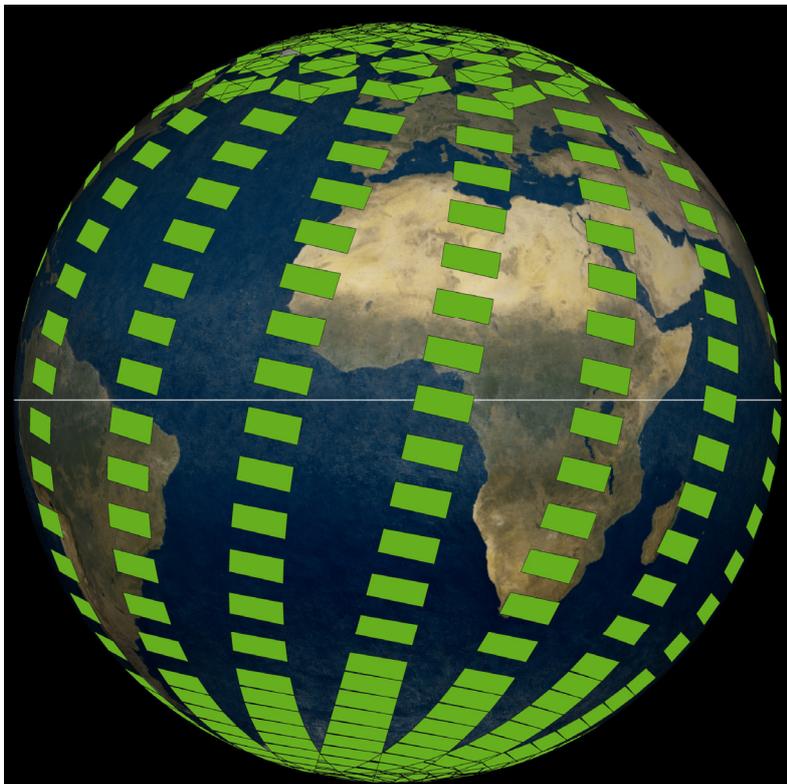


Fig. 4-8: Nadir coverage after 1 day of routine measurements. At the equator consecutive nadir ground pixels are separated by about 1600 km. This gap is filled within 3 days in case of nadir only state sequences. With successive limb/nadir states, full nadir coverage at the equator requires 6 days. (Courtesy: DLR-IMF/ SRON)

When defining mission scenarios, the accumulated activations of SCIAMACHY's *life limited items* (LLI) have to be taken into account. These are the mechanical components such as NDFM, APSM and the NCWM, the mechanism to open the Nadir Calibration Window, internal calibration lamps WLS and SLS and cryogenic heat pipes. Operating LLI according to agreed mission scenarios must not exceed the specified number of switches, cycles or 'on' times, i.e. individual in-flight LLI budgets, over the mission lifetime.

4.4 Parameter Tables

Utilising the high degree of flexibility in the instrument design can only be accomplished through parameterisation of on-board operations. For the execution of scientific and calibration and monitoring measurements it means that associated functions must be predefined and stored on-board with ground control having the capabilities to modify the instrument configuration. Changing the instrument status includes software updates via patching, as well as parameter settings via commanding. Those sets of parameters which are associated with basic instrument properties, e.g. scanner, thermal and mechanism control definitions, are termed *engineering* parameters. More than 4600 engineering parameters exist. Most of them have been defined prior to launch and were verified during the Commissioning Phase. During routine operations, engineering parameters are usually not subject to modifications. Parameters relating to the configuration of the spectrometer while acquiring data, the *measurement* parameters, have also been defined prior to launch. However, changing scientific requirements and following lessons learnt about actual instrument behaviour during the Commissioning Phase have made it necessary to update measurement parameters occasionally. Both types of parameters were burnt into the EEPROM (Electrical Erasable Programmable Read Only Memory) unit during instrument development. Whenever the ICU is initialised or reset, the EEPROM content is loaded and expanded into the ICU RAM (Random Access Memory). A copy of this content is then further loaded into the work area of the RAM and this part of the ICU RAM can be accessed by macrocommands in order to update parameters as required. Engineering and measurement parameters are organised in a series of parameter tables defining common functional tasks.

Type	Table	Number of Specified Parameters
<i>State</i>	Scanner State	10080
	Pixel Exposure Time	1400
	Hot Mode	420
	State Index	280
	State Duration	420
	Co-Adding	4480
	Detector Cmd Words	35
	DME Enable	8
	State RTCS Index	140
<i>Common</i>	Basic Scan Profile	60
	Relative Scan Profile	8652
	Cluster per Channel	40
	Cluster Definition	464

Table 4-1: Measurement parameter tables.

More than 25000 measurement parameters are needed to execute all the required measurements. Spectrometer settings, both for the detectors and the scanners, are provided via measurement parameters (Table 4-1). Tables usually relate to individual measurement states (see below) but ‘common’ tables serve all states. Particularly the values of the pixel exposure times and the co-adding factors, in conjunction with the definition of wavelength clusters, ensure optimised signal-to-noise ratios over the complete orbit. The product of PET and co-adding factor yields the integration time, which defines the readout frequency (see chapter 3.2). In the case where SWIR channels run into saturation, the *Hot Mode* parameters allow decreasing the exposure times in channels 6-8 below the minimum PET of 31.25 msec. The characteristics of the ASM/ESM rotations are defined via the Scanner State, Basic Scan Profile and Relative Scan Profile parameters. The Basic Scan Profile specifies the underlying standard motion of the respective mirror whereas the Relative Scan Profile is a mirror movement superimposed onto the Basic Scan Profile, e.g. fast upward/downward scans in elevation while the ESM is basically slowly moving in elevation.

4.5 Measurement States

The different configurations of the individual functions to operate SCIAMACHY in measurement modes are defined as *states* (SOST 2003). A state controls a sequence of activities to execute a particular measurement task, e.g. nadir observations with certain pixel exposure times, Sun occultation with a certain scan geometry, etc. A total of 70 states can be defined on-board. There they are stored as part of the Relative Time Command Sequence (RTCS) table which is also contained in the EEPROM and transferred to the ICU RAM. The entries in the RTCS table determine the execution of each state as a series of *primitive commands* which are activated sequentially once the first primitive command has been started. The parameters in the measurement tables control the execution of the primitive commands, i.e. of the state.

State Definition

SCIAMACHY’s scientific measurement objectives and requirements have necessitated the definition of the 70 individual states as listed in Table 4-2. 35 states implement scientific observation requirements, 26 are for the purpose of in-flight calibration, 4 for in-flight monitoring and the data from 5 states can be used for scientific and calibration analyses. The high number of calibration and monitoring states is the result of the thorough and complex in-flight calibration and monitoring concept.

The definition of each state requires the translation of scientific requirements into instrument functions, configurable via parameter settings. Once a state has been specified, its configuration is frozen, thus establishing the state *final flight status*. The corresponding parameter tables are uploaded on-board such that routine operations can execute the associated measurements whenever required. Changes to final flight definitions require strict configuration control and follow the Operation Change Request (OCR) procedure.

Nadir and Limb States

Continuous observations of the illuminated atmosphere occur in a sequence of matching limb/nadir states. The standard setting requires a wide swath geometry both in nadir and limb viewing. This enables global coverage within 3 days in nadir only mode or 6 days when running matching limb/nadir sequences. At medium to high latitudes, complete coverage is achieved earlier.

For a nadir state, the instrument Instantaneous Line-of-Sight (ILoS) is pointed, via the ESM, towards the subsatellite point. Starting left of the flight direction, the ESM is then moved during 4 sec across-track to the right with an angular rate yielding the required swath width on the ground. Having reached the turnaround on the right side, the ESM returns in 1 sec across-track back to the left side. For each integration time, a channel dependent readout of the spectrum occurs, synchronised with the scan. Depending on the measurement duration of the nadir state, a series of forward/backward scans covers a ground scene of typically 400 km along-track. Within the ground scene, individual ground pixels have a size which is defined by the selected integration time. They vary from about 26 km × 30 km (along-track × across-track) up to 32 km × 930 km for wide swath settings (see Fig. 4-9).

State ID	State	Measurement Type	Remark
1 - 7	nadir 960 km swath	science	all orbital positions
8, 26, 46, 63,	dark current	calibration	pointing at 250 km
9 - 15	nadir 120 km swath	science	all orbital positions
16	NDF monitoring, NDF out	monitoring	
17 - 21	sun ASM diffuser	calibration	Sun above atmosphere
22	sun ASM diffuser atmosphere	monitoring	various azimuth angles
23 - 25, 42 - 45	nadir pointing	science	all orbital positions
27	limb mesosphere	science	scanning 150 - 80 km
28 - 33	limb 960 km swath	science	all orbital positions
34 - 37, 40, 41	limb no swath	science	all orbital positions
38	nadir pointing left	monitoring	
39	dark current Hot Mode	calibration	
47	SO&C scanning/pointing	science, calibration	Sun through and above atmosphere
48	NDF monitoring, NDF in	monitoring	
49	SO&C nominal scanning, long duration	science, calibration	Sun through and above atmosphere
50	SO&C fast sweep scanning	calibration	
51	SO&C pointing	science, calibration	Sun through and above atmosphere
52	sun ESM diffuser, NDF out	calibration	Sun above atmosphere
53	sub-solar pointing	calibration	
54	moon nominal scanning	calibration	Moon above atmosphere
55	limb mesosphere-thermosphere	science	scanning 150-60 km
56	moon pointing	science, calibration	Moon through atmosphere
57	moon pointing, long duration	science, calibration	Moon through and above atmosphere
58	sub-solar pointing/nominal scanning	calibration	
59	SLS	calibration	
60	sub-solar fast sweep scanning	calibration	
61	WLS	calibration	
62	sun ESM diffuser, NDF in	calibration	Sun above atmosphere
64	sun extra mirror pointing	calibration	Sun above atmosphere
65	ADC, scanner maintenance	calibration	
66	sun extra mirror nominal scanning	calibration	Sun above atmosphere
68	sun extra mirror fast sweep scanning	calibration	Sun above atmosphere
69	SLS ESM diffuser	calibration	
70	WLS ESM diffuser	calibration	

Table 4-2: Measurement state definition.

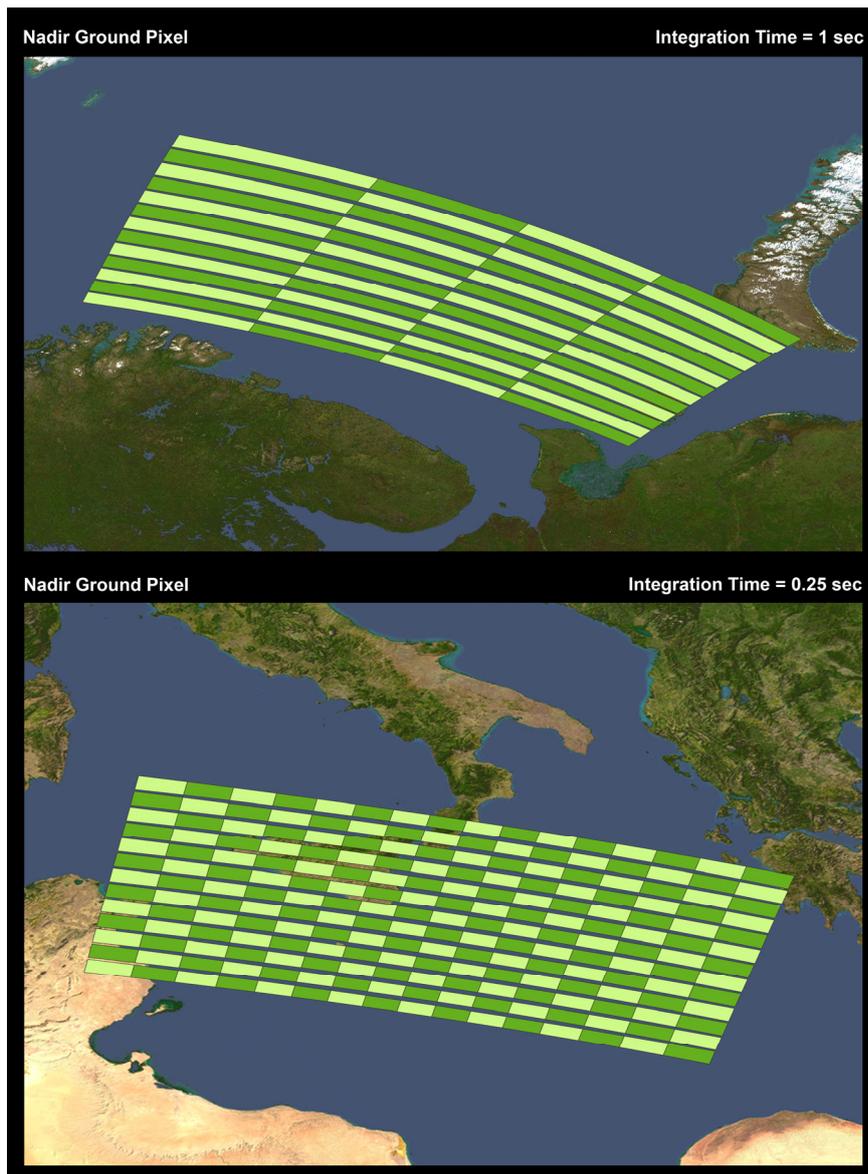


Fig. 4-9: The pattern of ground pixels in a nadir measurement for an integration time of 1 sec (top) and 250 msec (bottom). Only the forward scans are shown. This causes the along-track gaps between consecutive scans which vary in width due to a projection effect. Across-track extent is defined by the integration time while along-track the size reflects the dimension of the IFOV with only a small contribution of the integration time. (Courtesy: DLR-IMF; background maps: NASA)

While a nadir state requires operation of the ESM only, a limb state has to acquire light from the Earth's limb via the ASM. This light is reflected onto the ESM and then further into the spectrometer. Routine limb observations start with a horizontal scan 3 km below the horizon from the right to the left side. A vertical step of 3 km moves the ILoS upwards and another horizontal scan of the selected width is executed in opposite direction. In a sequence of vertical steps and horizontal scans, the full range of the atmosphere is observed nearly up to its top at about 93 km. When the last horizontal scan has finished, the ILoS is moved to an altitude of 250 km to obtain a short dark current measurement whilst pointing into open space. The IFOV at the distance of the Earth's limb corresponds to a ground pixel size of 103×2.6 km (across-track \times height). As for nadir states, the integration time determines the area covered by the readout, i.e. by the scanning IFOV. Largest limb ground pixels span $1060 \text{ km} \times 3.6$ km (across-track \times height, including step height error), smallest $230 \text{ km} \times 2.6$ km across-track \times height).

A limb state executes one of the most complex measurement functions defined for SCIAMACHY. This is due to the fact that ASM and ESM movements have to be synchronised with

the channel readouts in the horizontal scans. The ground scene of a limb scan is usually defined by the geolocation of the line-of-sight tangent point at the start and end of the state. Due to the elevation steps executed, the tangent point of the line-of-sight moves towards the spacecraft as the platform moves along the orbit. Thus a limb pixel appears to be rather narrow when defining the along-track extent via its tangent height geolocation at state start/stop.

Since atmospheric illumination conditions vary along the orbit as a function of the solar zenith angle, maximum spectral signal-to-noise ratios require selection of pixel exposure times as a function of orbital position. Therefore, science oriented states do exist for different orbital positions. A total of 7 nadir states each for wide and small swath settings, execute the same scanning trajectory but with different pixel exposure times. The same applies to limb states. Here, 6 states each for wide and small swath cover all orbit positions.

Occultation States

While nadir, limb and those calibration and monitoring states which are using the internal calibration units can be defined by selecting appropriate positions and scan ranges for the ESM and ASM, the states observing Sun or Moon require dynamic control of the scanners. Sun- and moonrise are affected by refraction. This leads to elevation rates of the rising solar/lunar disks being different between start and end of the occultation measurement. One rate results from refraction, the other from the platform's orbital motion. Scanner control via the Sun Follower would be able to compensate for this but cloud coverage may prevent the Sun Follower from successfully acquiring the solar or lunar disk. The control loop via the ICU works with a single scan rate only and is unsuitable for tracking the rising Sun/Moon in the early occultation phase. Therefore, the corresponding states implement a dedicated Sun/Moon occultation procedure based on the fact that at an altitude of about 17 km, refracted image and true position overlap well. From then on, the Sun/Moon rises with an almost constant rate. At the beginning of the state the ESM is rotated to point at an elevation corresponding to 17 km and performs continuous vertical scans of 2 sec each with a vertical range of $\pm 0.33^\circ$. The ASM is rotated to an azimuth angle which ensures that the Sun or Moon is within the field of view of the Sun Follower when their refracted disk appears at the limb. Because of the scan motion of the ESM, the object is detected when reaching an altitude between the horizon and 17 km. Once the Sun/Moon has arrived at an altitude of 17 km above the horizon, control is switched either to the SF or ICU. In the latter case a constant rate for the ESM is sufficient because from that elevation onwards refraction can be neglected. The ESM tracks the upward motion of the Sun/Moon in pointing or in one of the scanning modes. Nominal scanning moves the ESM in 2 sec $\pm 0.33^\circ$ around the centre of Sun or Moon. Because the integration times are shorter than 2 sec, the light can be analysed in horizontal slices of the disk. The fast sweep is a 2.1° wide scan over the solar disk in 0.125 sec. The sweep is centred at the Sun. The spectrometer records the integrated intensity at one sweep over the full disk.

Calibration and Monitoring States

Usually, calibration and monitoring states either operate the internal calibration lamps SLS and WLS, measure the dark signal from deep space or observe Sun and Moon. As long as the LoS during solar or lunar sunrise traverses the atmosphere, i.e. below an altitude of 100 km, the data serve scientific requirements. Above 100 km, they support calibration and monitoring. Sun measurements above the atmosphere can either observe the solar disk via the scan mirrors or reflect the light via one of the two diffusers. By selecting different light paths – e.g. using the extra mirror – and scanning properties, analysis of solar and lunar states is capable of providing not only Sun reference spectra for data processing but also information about the status of various optical components.

Knowledge of the dark current signal is required for successful interpretation of data from all measurement states. Therefore, 5 dark current states are specified which cover all relevant integration times. Dark states are executed on the eclipse side during measurement orbits and along the whole orbit during special and monthly calibration orbits. In a dark current state, the line of sight is directed to and maintained at an altitude of 250 km. It corresponds to pointing into deep space well above the atmosphere. No earthshine light is expected at this altitude and only the detector dark signal should be recorded.

SLS and WLS states are required to derive further pixel-dependent detector properties and to monitor the instrument's stability. Whenever one of these states is operated, the ESM is rotated to the position where its mirror reflects light from the lamps onto the entrance slit of the spectrometer. Orbital variations may be detected by running SLS or WLS states several times during an orbit. Since each lamp dissipates heat when operated, thermal perturbations have to be kept to a minimum.

The mission scenarios described in chapter 4.3 specify the execution of calibration and monitoring states on orbital, daily, weekly and monthly timescales. How frequently these are scheduled depends on their specific measurement goals. It has to be ensured that the entire calibration and monitoring measurements cover all aspects of the in-flight instrument characterisation. Fig. 4-10 depicts the associated measurements on orbital, daily, weekly and monthly timescales with state ID referring to the definitions in Table 4-2.

		Calibration & Monitoring Measurement																								
Calibration & Monitoring Timescale	Window	Sun nominal scan	Sun nominal scan/pointing	Sun fast sweep scan	Sun over ESM diffuser (NDFM in)	Sun over ESM diffuser (NDFM out)	Sun over ASM diffuser	Sun over extra mirror fast sweep scan	Sun over extra mirror pointing	Sun over extra mirror nominal scan	Sun over ASM diffuser through atmosphere	Sub-solar fast sweep scan	Sub-solar pointing/nominal scan	Sub-solar pointing	Moon pointing	Moon nominal scan	Dark current	WLS	SLS	WLS over ESM diffuser	SLS over ESM diffuser	NDFM monitoring (NDFM in)	NDFM monitoring (NDFM out)	Nadir pointing left	Nadir pointing	ADC
		SO&C										Sub-solar		MO&C												
Orbital	each orbit	49												57			8,26,46,63,67									65
Daily	1 st orbit	47	50	62										56	54		8,26,46,63,67									65
	1 st orbit (every 3 rd day)	47	50	62							53			56	54		8,26,46,63,67									65
	2 nd orbit	47					17-21	68						57			8,26,46,63,67									65
Weekly	1 st orbit	47	50	62										56	54		8,26,46,63,67	61	59							65
	2 nd orbit	47					17-21	68						57			8,26,46,63,67									65
Monthly	1 st orbit	47	50	62										56	54		8,26,46,63,67	61	59							65
	2 nd orbit	47			52			68						58			8,26,46,63,67					70				65
	3 rd orbit	47					17-21	64						60			8,26,46,63,67					69	48	16		65
	4 th orbit	47						66									8,26,46,63,67							38		65
	5 th orbit								22								8,26,46,63,67								23-25,42-45	65

Fig. 4-10: Calibration and monitoring scenarios from orbital to monthly timescales. In the top row the individual measurements and their targets, e.g. Sun, Moon, lamps, are listed. The states used in each calibration orbit refer to the definitions in Table 4-2. All states unrelated to the Sun or the Moon can be executed several times at any position along the orbit. (Courtesy: DLR-IMF)

4.6 Timelines

Timeline Concept

The execution of single states is possible. However, with an average state duration of about 60 sec, commanding a complete orbit, state by state, is cumbersome, both for the ENVISAT ground segment and for operations planning. Therefore, SCIAMACHY allows execution of predefined state sequences. These sequences are called *timelines* (SOST 2001b). A total of 63 timelines can be stored on-board in the Timeline table of the ICU RAM.

Each timeline is characterised by the chronological sequence of states and its total duration. Once the timelines are stored in the Timeline table, they can be started via MCMD. This MCMD provides the scheduled timeline start time. If the timeline includes a state executing a Sun or Moon measurement, e.g. sunrise at a given altitude, sub-solar event or moonrise at a given altitude, additional position parameters – aspect and nadir angle together with nadir rate – specifying the solar or lunar celestial positions are uploaded with the MCMD. They are used by the instrument to position the scan mirrors correctly at the beginning of the particular state to initially acquire the target. Execution of the timeline is a complex interaction between various parameter tables. From triggering

the first timeline related commands in the RTCS table until the sequence of states has finally run to completion, information is extracted from tables and used to control instrument measurement activities. It is a prerequisite for successful operations that the content of the associated tables is consistent and free of conflicts. The definition of the timeline header information ensures that Sun or Moon states observe their target at the right time and location to meet the scientific requirements. Since the start timeline MCMD can provide only one set of position parameters for one solar or lunar event, there can only exist one Sun or Moon related state in a timeline. Thus, timelines including a Sun or Moon state are fixed in time and are called *Sun fixed* or *Moon fixed*. All other timelines without a Sun or Moon state are scheduled relative to Sun or Moon fixed timelines.

Timeline Definition

Based on the objectives of each orbital mission scenario and the occurrence of Sun and Moon fixed events along the orbit, timelines can be built from the set of 70 states. Each timeline corresponds to an orbit interval with start/stop being related to a Sun or Moon fixed event. Timelines can be assigned to the following orbit intervals:

- SO&C window
- MO&C window
- start to end of eclipse
- end of SO&C window to start of eclipse
- end of SO&C window to start of sub-solar window
- end of sub-solar window to start of eclipse
- end of SO&C window to start of MO&C window
- end of sub-solar window to start of MO&C window
- end of MO&C window to start of eclipse

A complete orbital mission scenario is implemented by assembling a sequence of timelines which covers the full orbit and executes those states required in the scenario. This is an efficient building block approach which reduces the command load drastically. The most frequent scenario executes 4 timelines only – a SO&C timeline, followed by a long limb/nadir sequence and two calibration timelines in eclipse. Because the sequence of limb/nadir states generates a ring-like pattern of nadir and limb ground pixels, it has been decided to switch between two limb/nadir sequences in consecutive orbits. At latitudes where nadir ground pixels exist in one orbit, limb ground pixels are generated in the following orbit. The result is a chessboard type pattern better suited for global value-added data processing. In order to obtain earthshine spectra with a signal-to-noise ratio as high as possible, the sequence of nadir and limb states in a timeline for execution on the illuminated side of the orbit needs to reflect the relation between pixel exposure times and orbital position. For a selected swath setting, all defined nadir and limb pixels are usually required to cover the interval from sunrise to sunset.

All timelines starting or ending with the MO&C window have to accommodate the strong temporal variability of lunar events within a monthly visibility period. Therefore, several versions of Moon related timelines with different lengths do exist for the same segment. Triggered by mission planning, they are exchanged on-board whenever required by lunar position. This is different from timelines allocated to Sun related orbit segments which require only single instances due to the moderate seasonal changes (Fig. 4-11).

As in the case of states, a final flight configuration which reflects the currently agreed and verified set of 63 timelines exists. Its configuration controlled status can be modified via the same OCR procedure as for states.

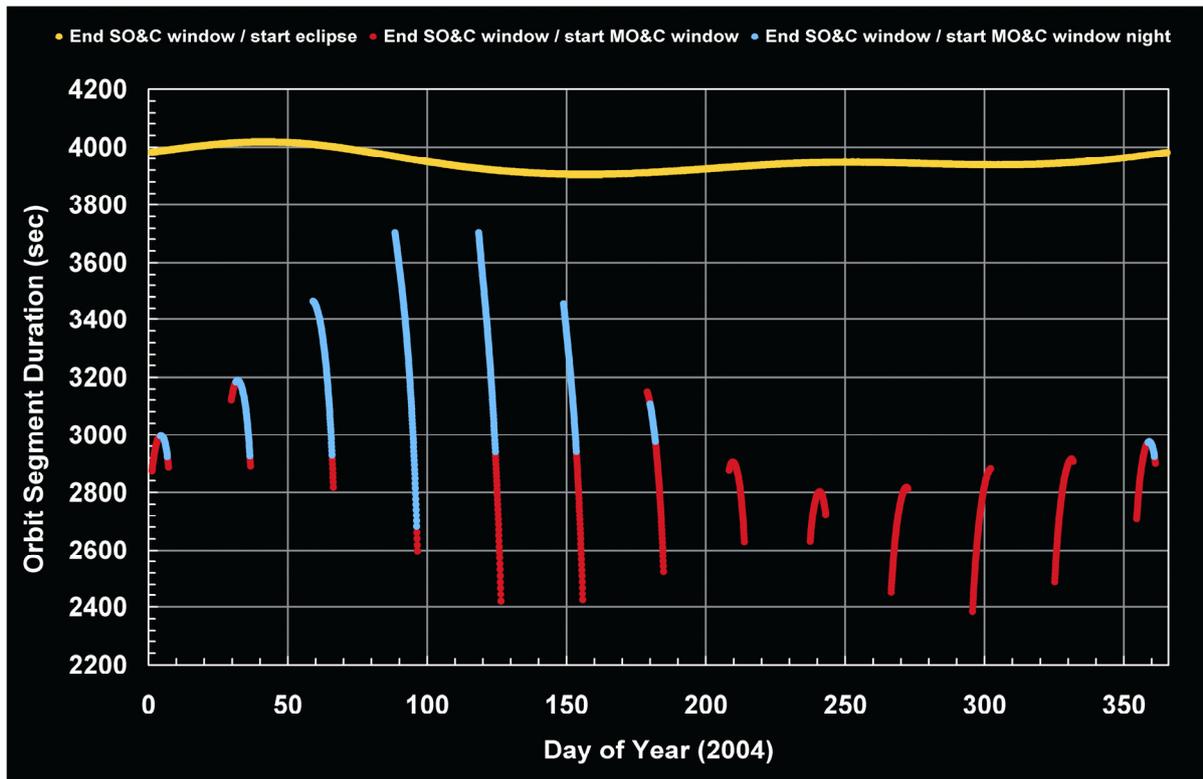


Fig. 4-11: Example of the seasonal temporal variability of orbital segments for the year 2004. The time interval between end of SO&C window and start of eclipse varies only slightly over a year (yellow). In the monthly lunar visibility periods, the time between end of MO&C window and start of eclipse shows a much higher variation (red curves). The blue segments indicate lunar visibility phases where moonrise occurs on the nightside, i.e. those which can be used for occultations. (Courtesy: DLR-IMF)

4.7 SCIAMACHY Operations Setup

Operations of the instrument include mission planning, configuration control of the on-board measurement status and instrument monitoring. Due to its status as an AO instrument, operational responsibilities for SCIAMACHY were split between ESA and DLR/NIVR. Agreements define that FOCC executes daily SCIAMACHY flight operations as for all other ENVISAT instruments but based on input from the AOP, whereas operational offline tasks are assigned to DLR/NIVR. On the AOP side, the SCIAMACHY Operations Support Team (see “The Making of SCIAMACHY” of Chapter 3) interfaces with ESA, particularly FOCC, to fulfil these functions in order to accomplish safe operations and generation of high quality measurement data.

SCIAMACHY mission planning has the task to generate and plan timelines around solar and lunar events in each orbit. Since the occurrence of such events depends purely on orbital and celestial mechanics, it is predictable. Well in advance of actual operations, orbit analysis determines the properties of Sun and Moon related orbit segments. Timelines are then generated ensuring that the complete orbit is covered with measurements – scientific on the illuminated side of the orbit and calibration and monitoring intermittent with specific scientific in the eclipse phase when the Earth’s atmosphere appears dark. Regular mission planning consists of defining the measurement programme for time slices of several weeks by SCIAMACHY Operations Support. This programme is translated into timeline sequences for each orbit and provided to ENVISAT’s mission planning system (MPS). The sequences must yield maximum orbital coverage, permit conflict-free instrument operations and comply with the overall ENVISAT flight operation rules. ENVISAT MPS allocates absolute timeline start times. In order to inform validation users well in advance of actual operations about planned measurements, Operations Support determines the geolocation of planned nadir and limb ground pixels based on an orbital simulation of the schedule.

Configuration control of the on-board measurement status is responsible for the final flight status of states and timelines. A database of engineering parameters, measurement parameters and timelines is maintained on SCIAMACHY side by Operations Support. Whenever required, modified tables are generated, translated into the MCMD format and sent to FOCC. FOCC integrates SCIAMACHY's input into the overall ENVISAT command database and uploads it according to the specified validity time.

Instrument monitoring includes several operations related aspects. Both the monitoring at FOCC and SCIAMACHY Operations Support uses HK telemetry and report formats to compare executed with planned operations for detecting anomalies. While FOCC focuses on the day-by-day operations following the procedures specified in the Instrument Operation Manual (IOM), Operations Support monitoring covers also long-term aspects including failure investigations in case of anomalies. Particularly important is the monitoring of subsystems which directly impact data quality, i.e. the reliability of the retrieved atmospheric parameters. This concerns the thermal systems ATC and TC. The regular weekly checking of detector and OBM temperatures verifies that the temperatures remain within specified limits. In case of limit exceedings, appropriate countermeasures are elaborated by SOST, translated into SCIAMACHY Operations Requests (SOR) and submitted to FOCC for implementation. Additionally, the accuracy of the LoS during measurements requires attention. It is determined by the interaction of several components such as e.g. platform attitude, extra-mispointing or scanners. Those parameters which are relevant for specifying their performance are systematically analysed. SOST provides relevant findings not only to flight operations but also to the SQWG ensuring that the LoS knowledge in data processing does not degrade.

The past, present and planned status of SCIAMACHY mission planning, instrument configuration and long-term monitoring results are reported by SCIAMACHY Operations Support via its dedicated website at <http://atmos.caf.dlr.de/projects/scops/>. This site not only includes dynamic information but also informs about orbit properties and the overall operations and mission planning concept. A comprehensive description of the final flight states, the corresponding valid parameter settings, a list of timelines and how consolidated level 0 products reflect the SCIAMACHY measurement status supplement the website.

References

EADS Astrium GmbH SCIAMACHY Team. 2003. Instrument Operation Manual (IOM – MA-SCIA-0000DO/01), *Technical Document*, EADS Astrium.

SOST-DLR. 1996. SCIAMACHY Orbit Analysis (PO-TN-DLR-SH-0002). *Technical Document*, DLR.

SOST-DLR. 2001a. SCIAMACHY Operations Concept I. Mission Scenarios (PO-TN-DLR-SH-0001/1). *Technical Document*, DLR.

SOST-DLR. 2001b. SCIAMACHY Operations Concept II. Timelines: Generation, Planning & Execution Rules and Reference Timelines (PO-TN-DLR-SH-0001/2). *Technical Document*, DLR.

SOST-DLR. 2003. SCIAMACHY Operations Concept III. Instrument States and Onboard Tables (PFM) – (PO-TN-DLR-SH-0001/3). *Technical Document*, DLR.